

iTrack Pro Series

TL26-30W

Reflector



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Rated life:	>35,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	0.95KG


Ordering Information:

○White ●Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲ 15°	2980 lm	3000K	○	TL264-30W-830-W-15
					●	TL264-30W-830-B-15
		3160 lm	4000K	○	TL264-30W-840-W-15	
				●	TL264-30W-840-B-15	
		▲ 20°	3010 lm	3000K	○	TL264-30W-830-W-20
					●	TL264-30W-830-B-20
	3250 lm	4000K	○	TL264-30W-840-W-20		
			●	TL264-30W-840-B-20		
	▲ 45°	2990 lm	3000K	○	TL264-30W-830-W-45	
				●	TL264-30W-830-B-45	
	3190 lm	4000K	○	TL264-30W-840-W-45		
			●	TL264-30W-840-B-45		
>90	>80	▲ 15°	2670 lm	3000K	○	TL264-30W-930-W-15
					●	TL264-30W-930-B-15
		2810 lm	4000K	○	TL264-30W-940-W-15	
				●	TL264-30W-940-B-15	
		▲ 20°	2700 lm	3000K	○	TL264-30W-930-W-20
					●	TL264-30W-930-B-20
	2830 lm	4000K	○	TL264-30W-940-W-20		
			●	TL264-30W-940-B-20		
	▲ 45°	2680 lm	3000K	○	TL264-30W-930-W-45	
				●	TL264-30W-930-B-45	
	2810 lm	4000K	○	TL264-30W-940-W-45		
			●	TL264-30W-940-B-45		

Technical Data test pattern


CRI80 15°

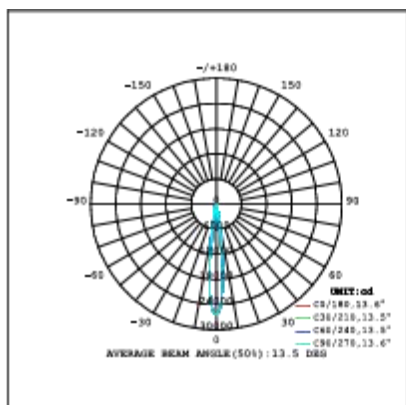


3000K

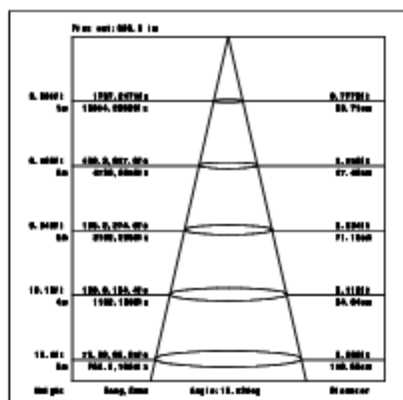


4000K

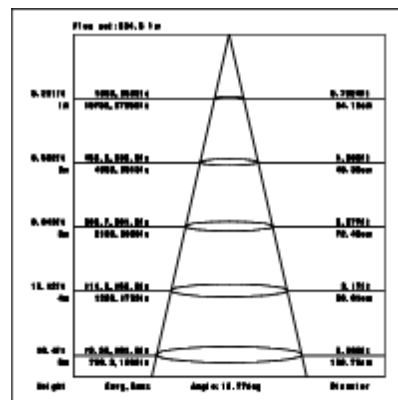


CRI80 20°

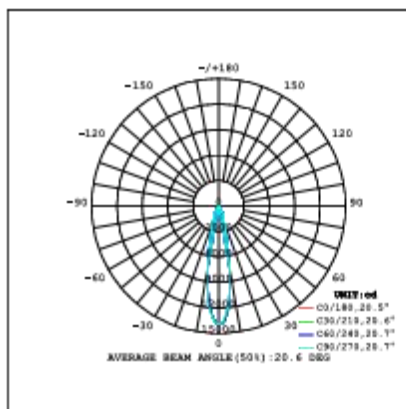


3000K

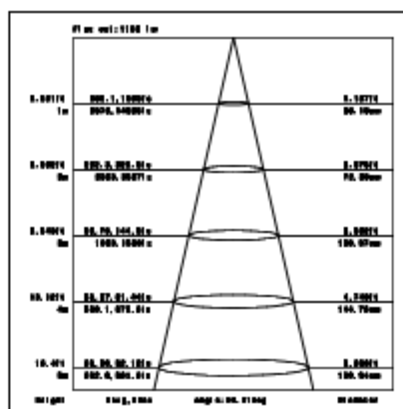


4000K

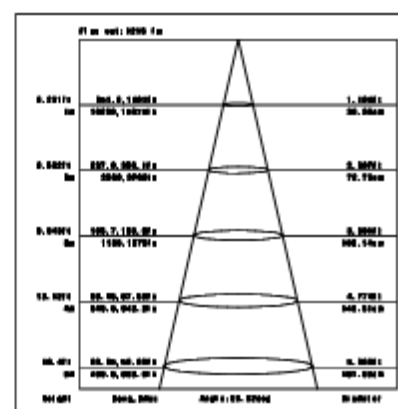


CRI80 45°

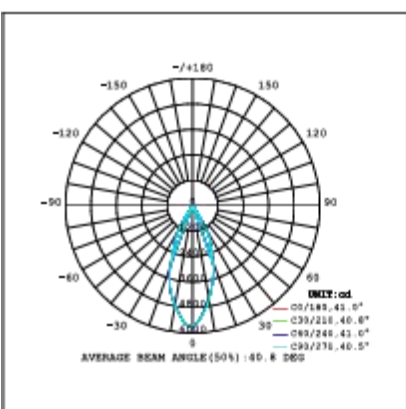

3000K

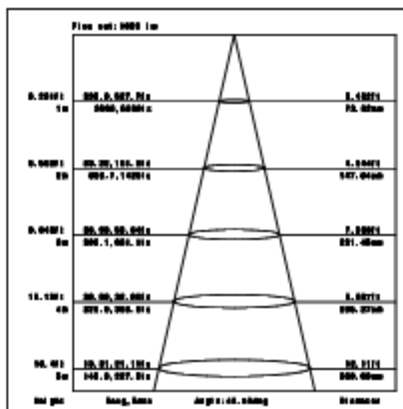




4000K

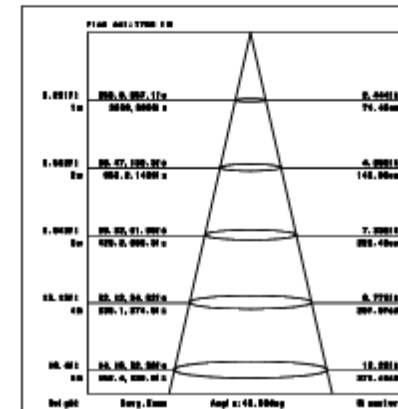

CRI90 15°

3000K




4000K

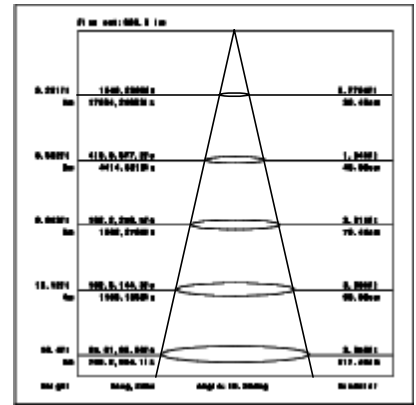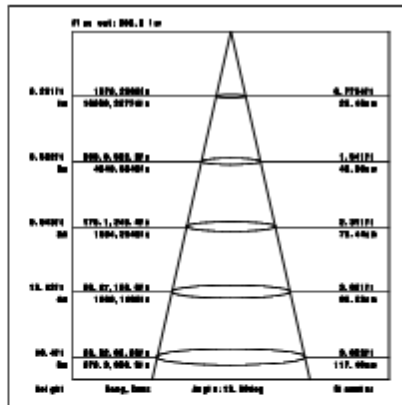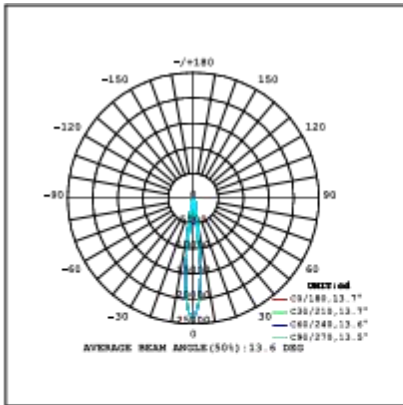

CRI90 20°

3000K




4000K

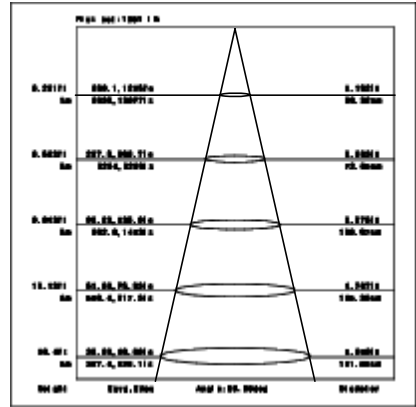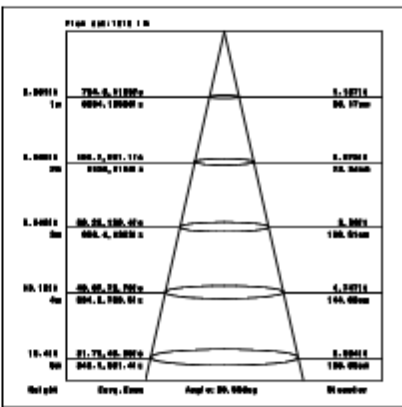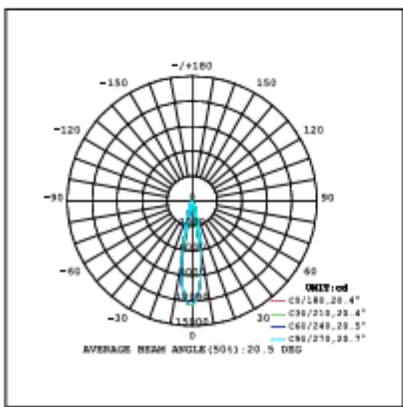


CRI90 45°

3000K

4000K

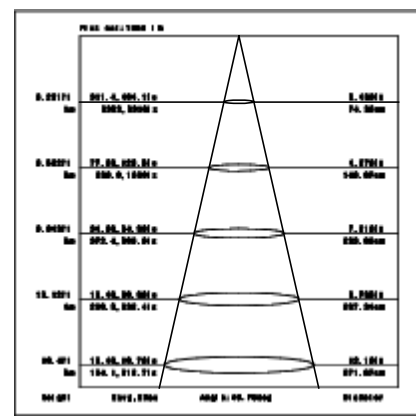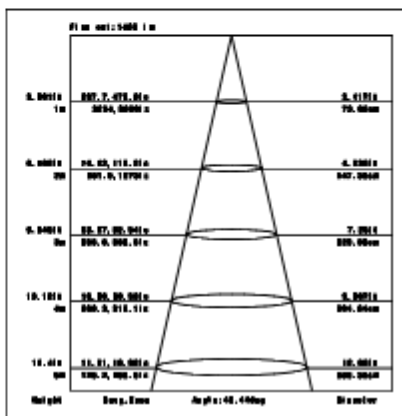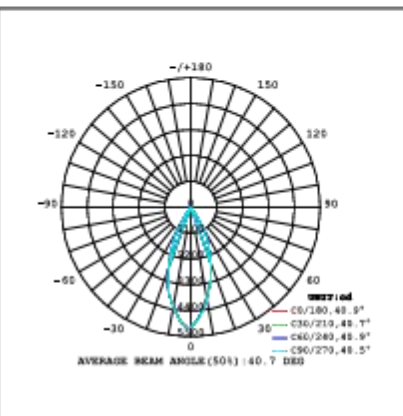


Installation instruction

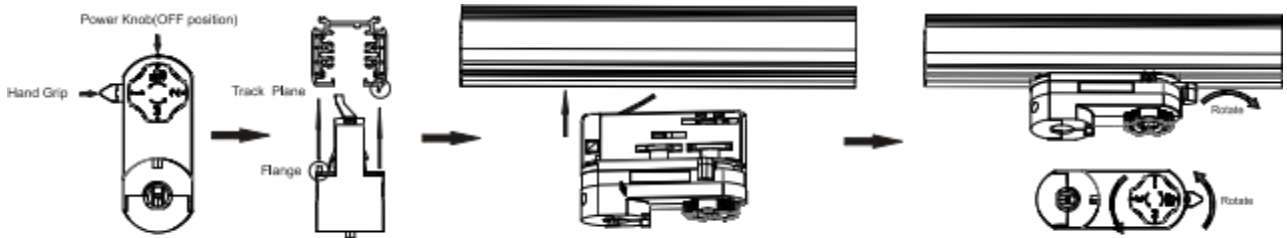


1. Make sure the positions are exactly the same as the pictures show before installation.
2. The adaptor flange is in the same direction with the track plane.
3. Track adaptor into the track
4. Revolve the hand grip in place, select the power knob: phase 1/phase 2/ phase 3. Can swing clockwise and anticlockwise.

Remove Instructions

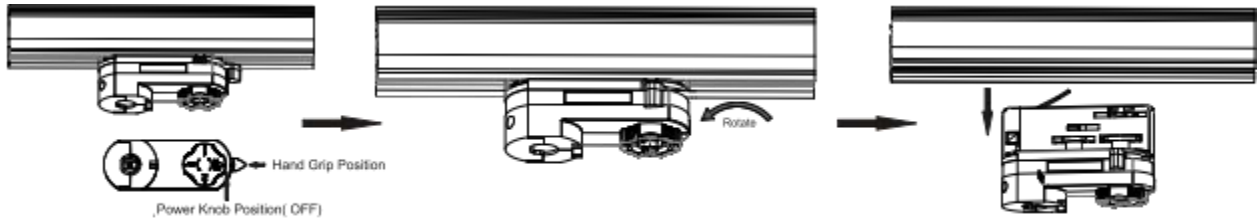


1. Make sure the track adaptor's positions are the same as the picture shows before removing.
2. When power knob at the "OFF" position, rotate the hand grip at 90 degree.
3. Remove the track adaptor.


Cautions

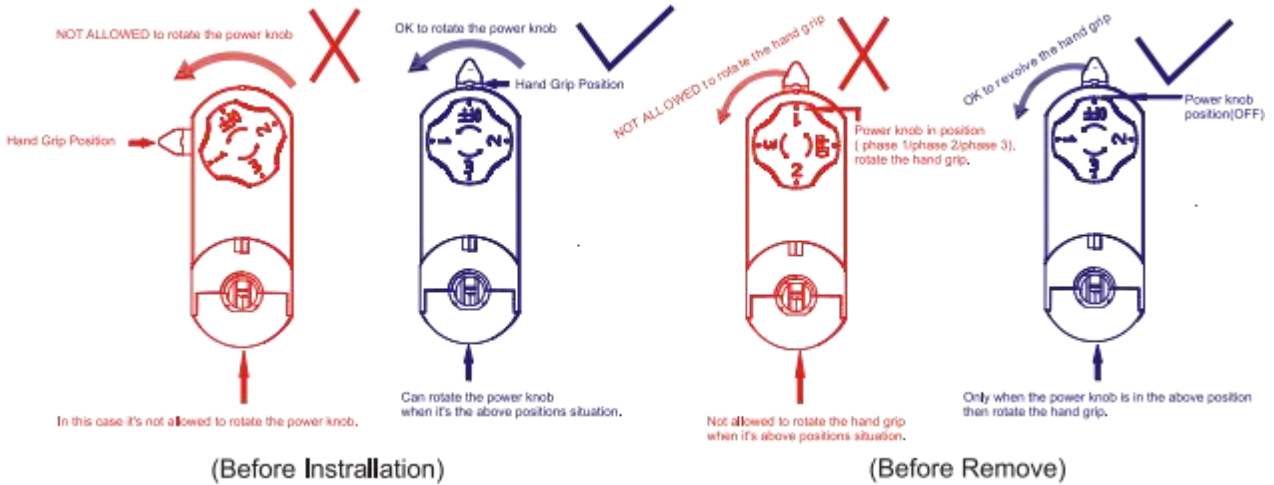

Packaging:



Box
L130*W130H310mm
1pc/box
GW:1. 15kg/box

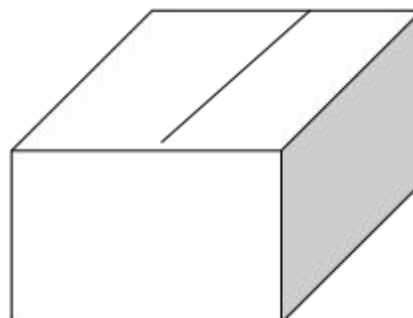

Outer carton
L670*W405*H325mm
15pcs/CTN
GW: 19kg/carton

Product naming system

