


iTrack Pro Series

TL27-20W

optical lens



○ White ● Black

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	500mA, 35-37V
Rated life:	0>50,000 hours
Operating temperature:	-20℃~40℃
Storage temperature:	
Certificate:	CE/RoHS
Weight:	0.83KG

Ordering Information:




Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
20W	>80	▲ 12°	2090 lm	3000K	○	TL274-20W-830-W-12
					●	TL274-20W-830-B-12
		2120 lm	4000K	○	TL274-20W-840-W-12	
				●	TL274-20W-840-B-12	
		▲ 24°	2280 lm	3000K	○	TL274-20W-830-W-24
					●	TL274-20W-830-B-24
		2320 lm	4000K	○	TL274-20W-840-W-24	
				●	TL274-20W-840-B-24	
		▲ 45°	2300 lm	3000K	○	TL274-20W-830-W-45
					●	TL274-20W-830-B-45
		2270 lm	4000K	○	TL274-20W-840-W-45	
				●	TL274-20W-840-B-45	
	>90	▲ 12°	1780 lm	3000K	○	TL274-20W-930-W-12
					●	TL274-20W-930-B-12
		1890 lm	4000K	○	TL274-20W-940-W-12	
				●	TL274-20W-940-B-12	
		▲ 24°	1930 lm	3000K	○	TL274-20W-930-W-24
					●	TL274-20W-930-B-24
		2040 lm	4000K	○	TL274-20W-940-W-24	
				●	TL274-20W-940-B-24	
		▲ 45°	1930 lm	3000K	○	TL274-20W-930-W-45
					●	TL274-20W-930-B-45
		2070 lm	4000K	○	TL274-20W-940-W-45	
				●	TL274-20W-940-B-45	

Technical Data test pattern

CRI80 12°

3000K




4000K

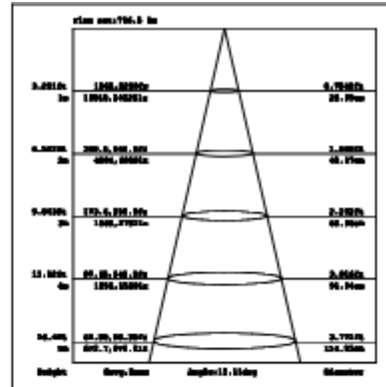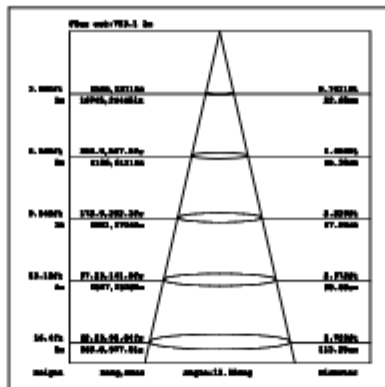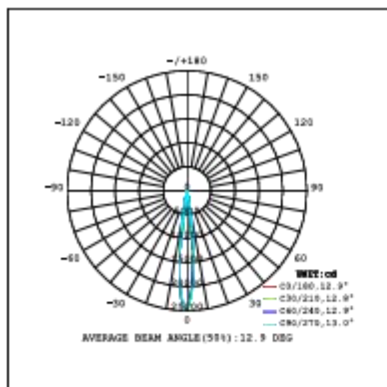

CRI80 24°

3000K




4000K

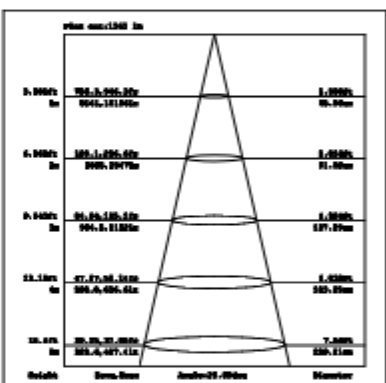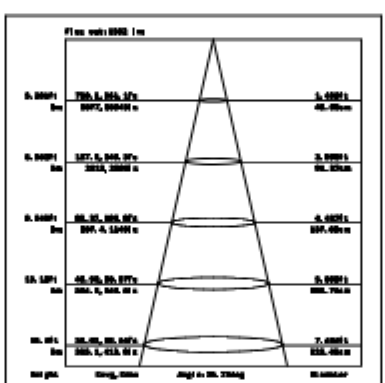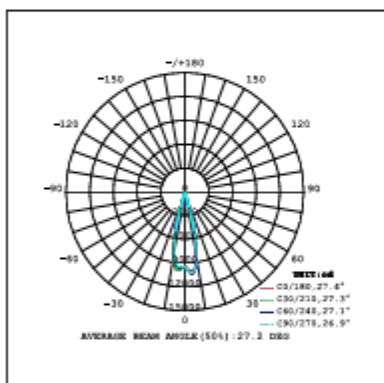


CRI80 45°

3000K


4000K

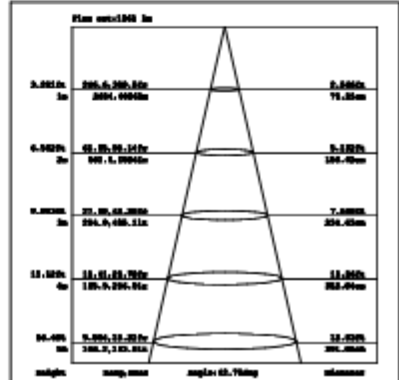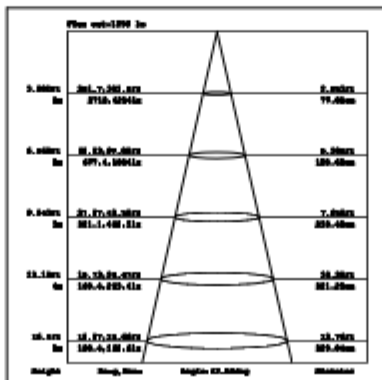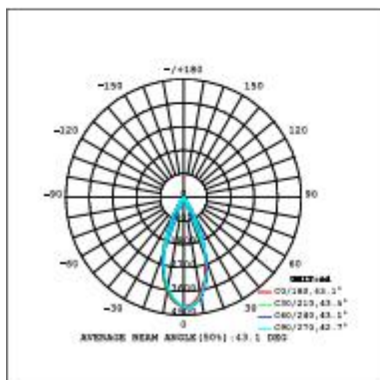


CRI90 12°

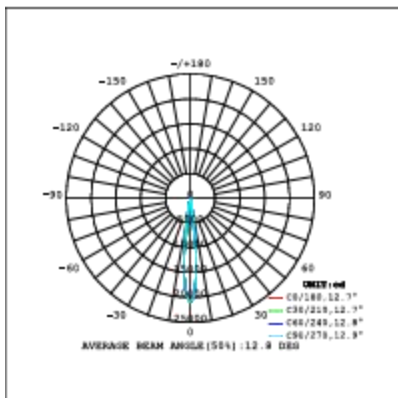


3000K

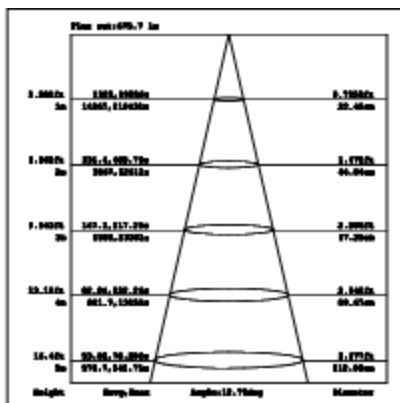


4000K

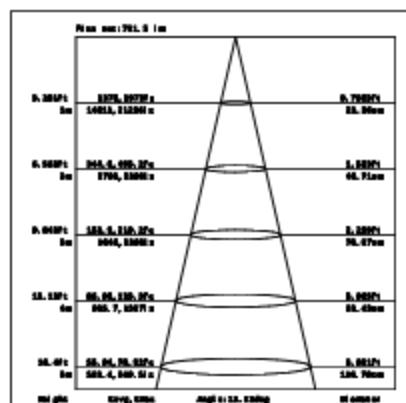


CRI90 24°

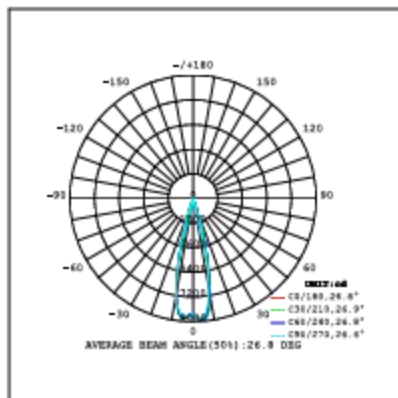


3000K

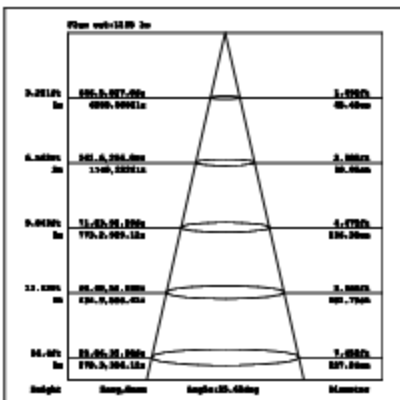


4000K

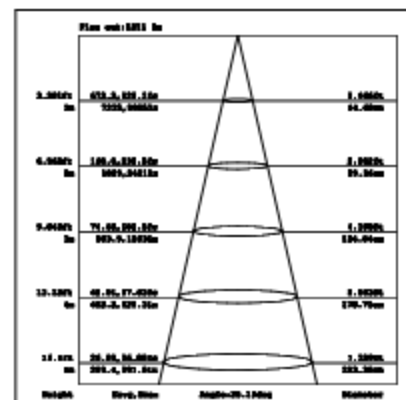


CRI90 45°

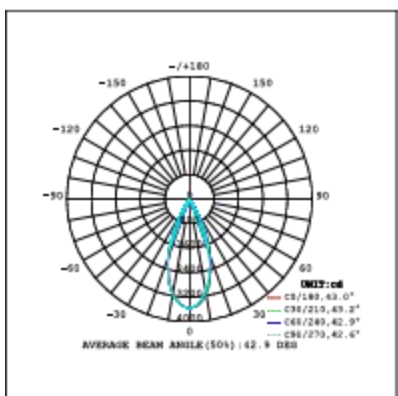


3000K

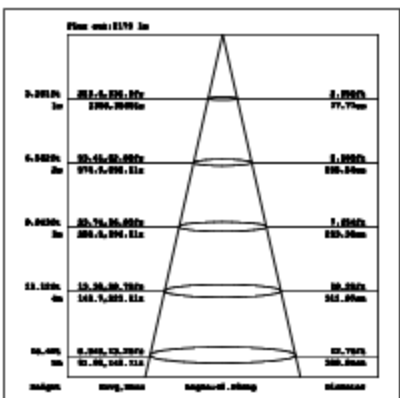


4000K

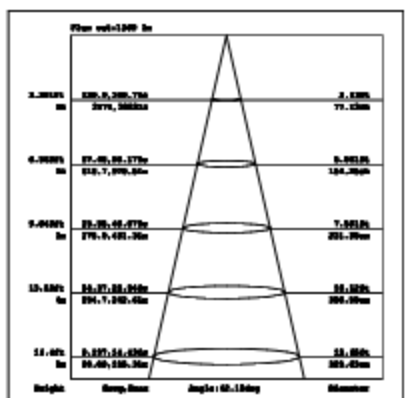


Installation instruction

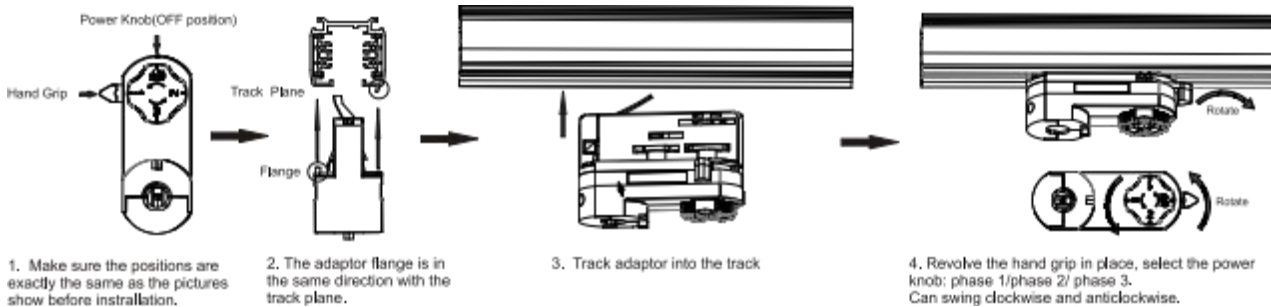


Remove Instructions

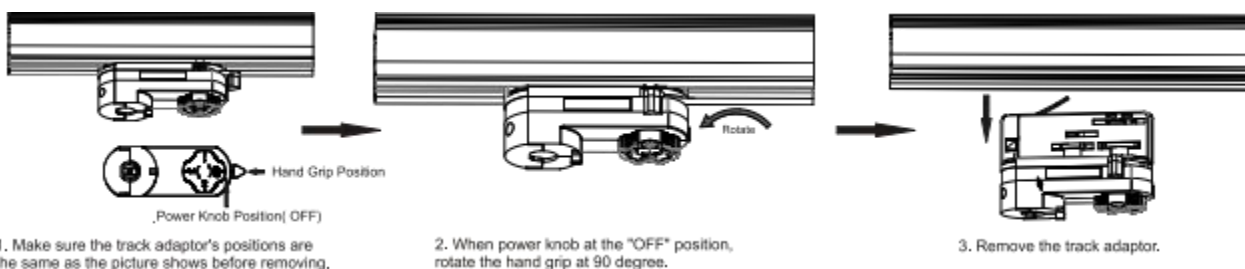


Cautions

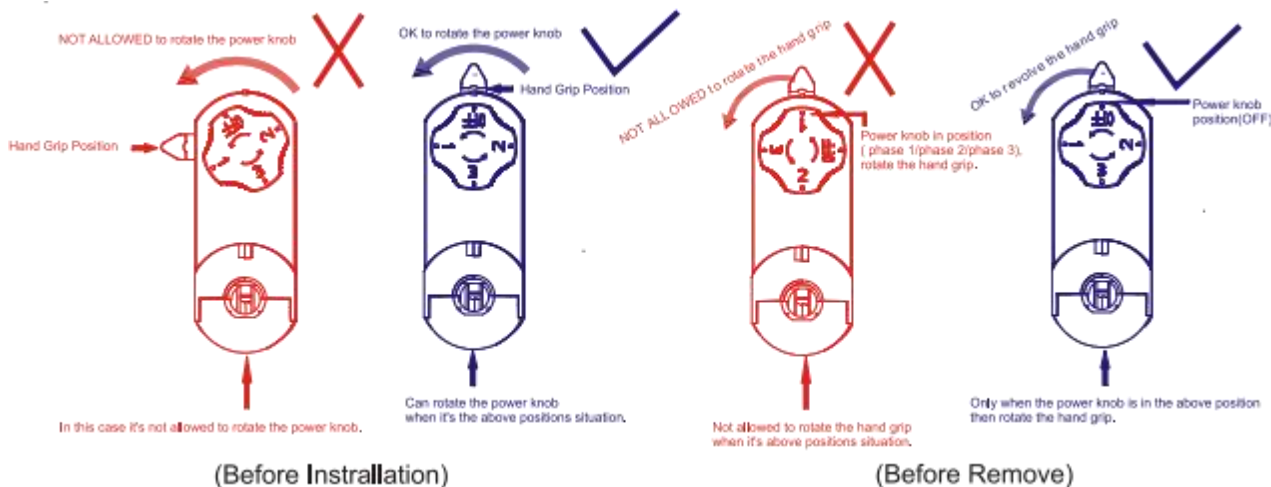

Packaging:



Box
L100*W100H290mm
1pc/box
GW: 1.02kg/box

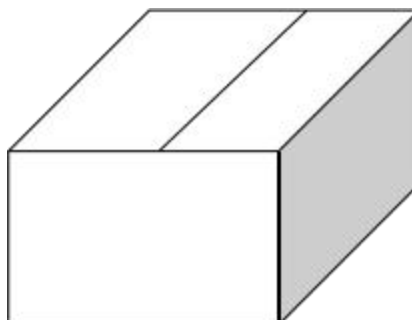

Outer carton
L515xW415xH305mm
20pcs/CTN
GW: 21.5kg/carton

Product naming system

