


Edge Series

**BL47-12W**

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
Current:	250mA
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	
Package(mm):	

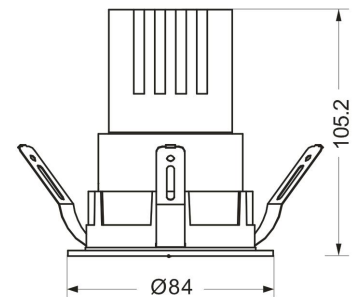

Ordering Information:

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
12W	>90	▲ 22°	670 lm	3000K	○	BL471-12W-930-W-22
			700 lm	4000K	○	BL471-12W-940-W-22
		▲ 25°	675 lm	3000K	○	BL471-12W-930-W-25
			705 lm	4000K	○	BL471-12W-940-W-25
		▲ 40°	710 lm	3000K	○	BL471-12W-930-W-40
			770 lm	4000K	○	BL471-12W-940-W-40




○ White+ Gray

Technical Data test pattern

**CRI>90**

**12W**

	LED			Luminaire	
Power	6.1W			12W	
Current	180mA			250mA	
Flux	924lm	948lm	960lm	710lm	770lm
CCT	3000K	4000K	5000K	3000K	4000K
Color tolerance	3 SDCM				
Service life	>50000Hrs			>50000Hrs	
Beam Angle	120°			22°/25°/40°	
Typical Efficiency				>85%	
Efficacy(lm/W)	151	155	157	59	64

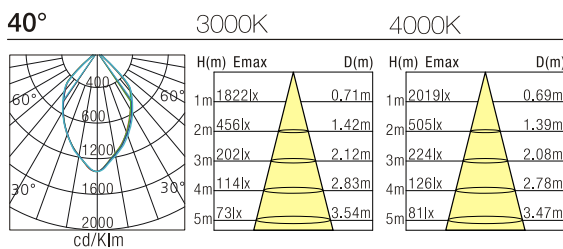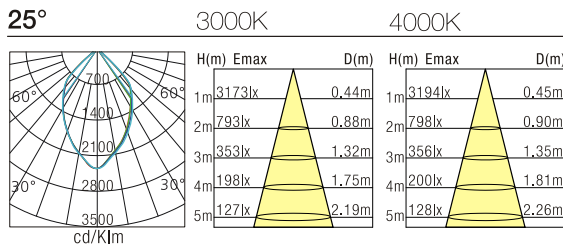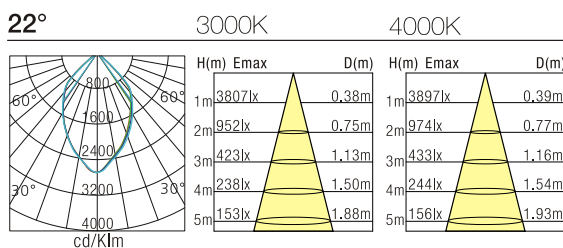

Product naming system

