


Edge Series

**BL48-20W**

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
Current:	500mA
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	
Package(mm):	

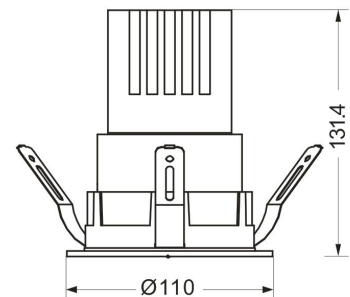




Ordering Information:

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
20W	>90	▲ 20°	1177 lm	3000K	○	BL481-20W-930-W-20
			1287 lm	4000K	○	BL481-20W-940-W-20
		▲ 25°	1260 lm	3000K	○	BL481-20W-930-W-25
			1300 lm	4000K	○	BL481-20W-940-W-25
		▲ 40°	1350 lm	3000K	○	BL481-20W-930-W-40
			1412 lm	4000K	○	BL481-20W-940-W-40

○ White+ Gray

Technical Data test pattern

20W	CRI>90	
	LED	Luminaire
Power	12.2W	20W
Current	360mA	500mA
Flux		1350lm / 1412lm
CCT	3000K / 4000K	3000K / 4000K
Color tolerance	3 SDCM	
Service life	>50000Hrs	>50000Hrs
Beam Angle	120°	20°/25°/40°
Typical Efficiency		85%
Efficacy(lm/W)		68 / 71

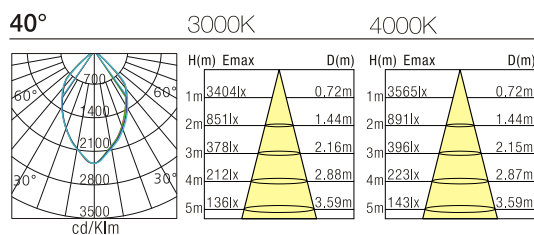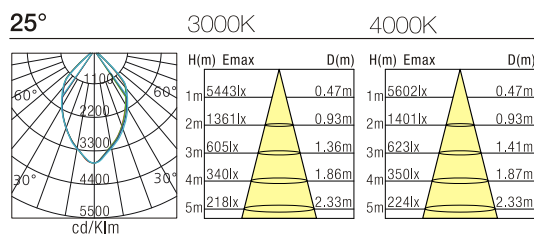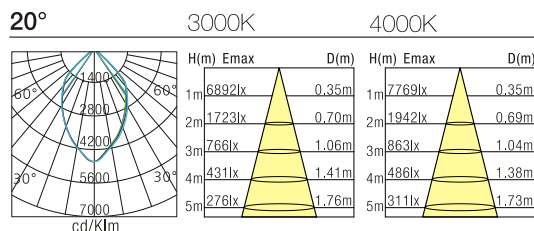

Product naming system

