

LED TRACK LIGHT




iTrack Vera Series

TL16-20W



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
Current:	500mA
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	1.15KG
Package(mm):	600x540x265mm, 8pcs/carton

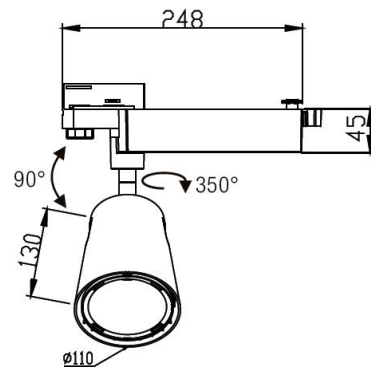

Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
20W	>80	▲ 10°	2040 lm	3000K	○	TL164-20W-830-W-10
			2050 lm	4000K	●	TL164-20W-830-B-10
		▲ 20°	2060 lm	3000K	○	TL164-20W-840-W-10
			2060 lm	4000K	●	TL164-20W-840-B-10
		▲ 38°	2050 lm	3000K	○	TL164-20W-830-W-20
			2040 lm	4000K	●	TL164-20W-830-B-20
	>90	▲ 10°	1730 lm	3000K	○	TL164-20W-840-W-20
			1870 lm	4000K	●	TL164-20W-840-B-20
		▲ 20°	1750 lm	3000K	○	TL164-20W-830-W-38
			1900 lm	4000K	●	TL164-20W-830-B-38
		▲ 38°	1750 lm	3000K	○	TL164-20W-840-W-38
			1890 lm	4000K	●	TL164-20W-840-B-38
20W	>80	▲ 10°	1730 lm	3000K	○	TL164-20W-930-W-10
			1870 lm	4000K	●	TL164-20W-930-B-10
		▲ 20°	1750 lm	3000K	○	TL164-20W-940-W-10
			1900 lm	4000K	●	TL164-20W-940-B-10
		▲ 38°	1750 lm	3000K	○	TL164-20W-930-W-20
			1890 lm	4000K	●	TL164-20W-930-B-20
	>90	▲ 10°	1730 lm	3000K	○	TL164-20W-930-W-38
			1890 lm	4000K	●	TL164-20W-930-B-38
		▲ 20°	1750 lm	3000K	○	TL164-20W-940-W-38
			1890 lm	4000K	●	TL164-20W-940-B-38

LED TRACK LIGHT




Technical Data test pattern


CRI80 10°

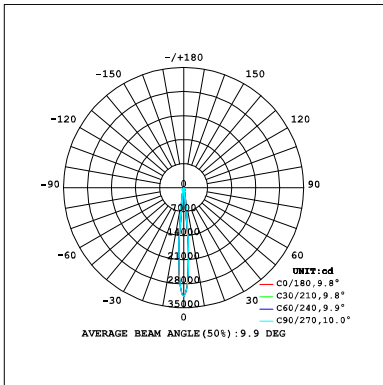


3000K

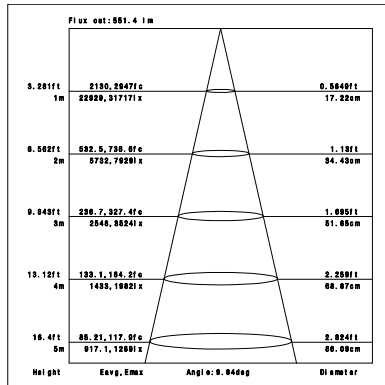


4000K

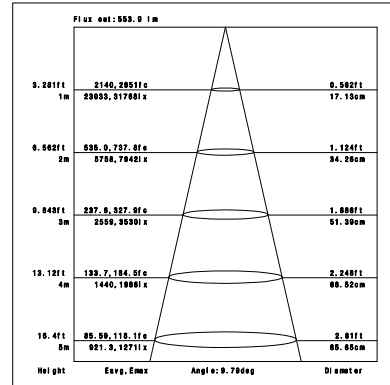


CRI80 20°

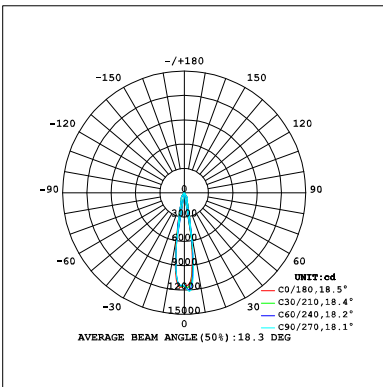


3000K

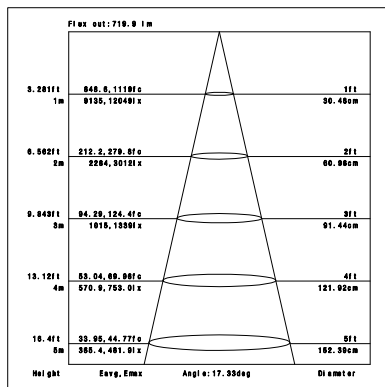


4000K

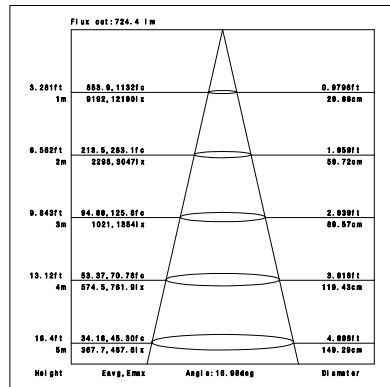


CRI80 38°

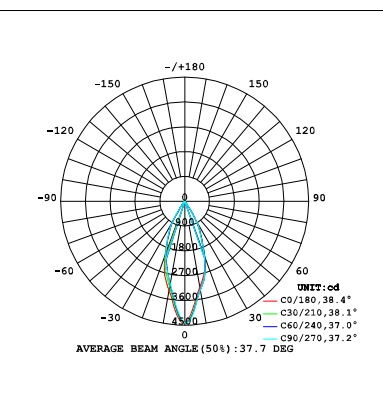

3000K

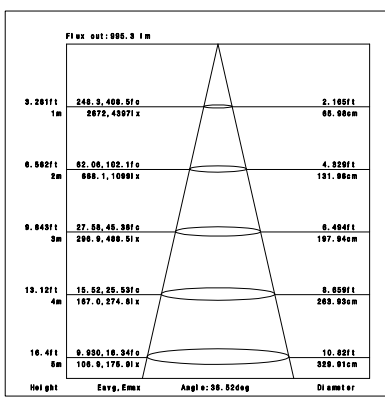


4000K

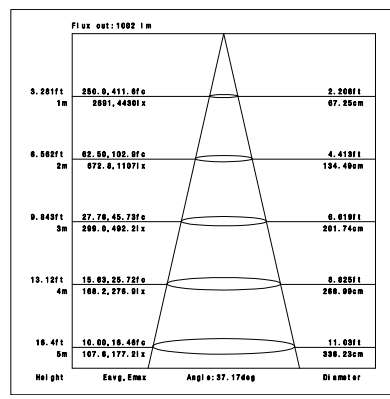


LED TRACK LIGHT


CRI90 10°

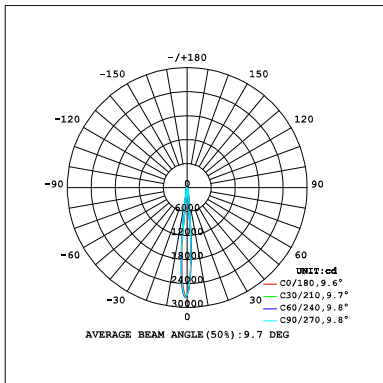


3000K

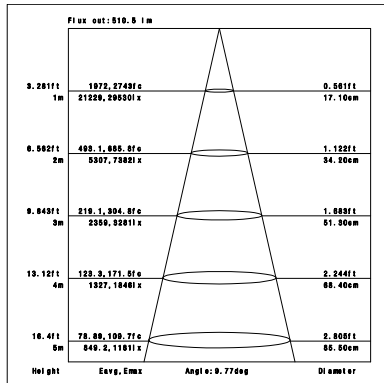


4000K

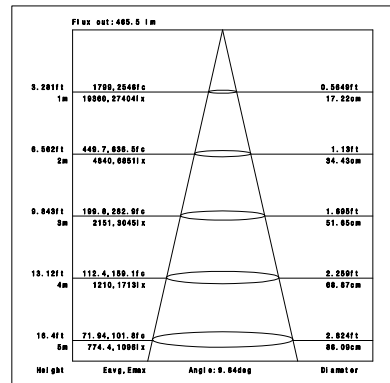


CRI90 20°

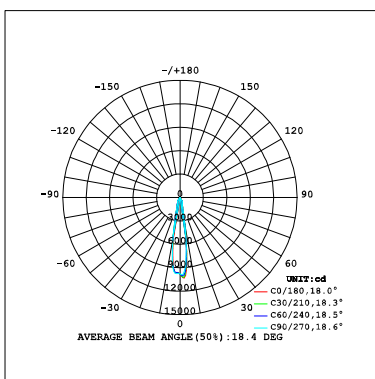


3000K

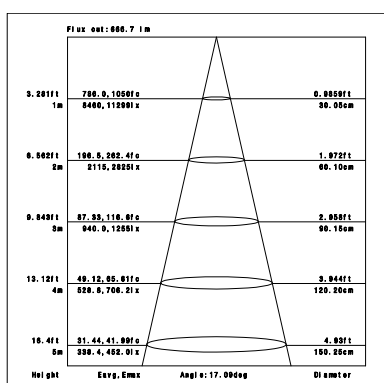


4000K

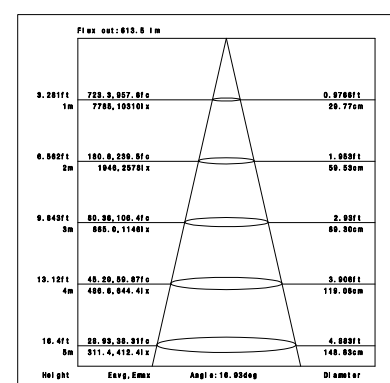


CRI90 38°

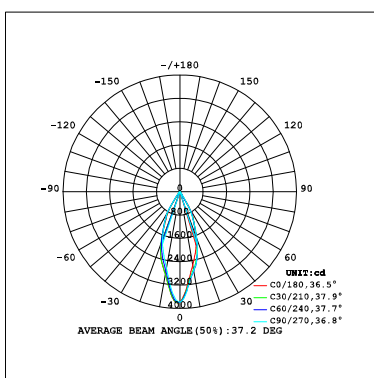


3000K

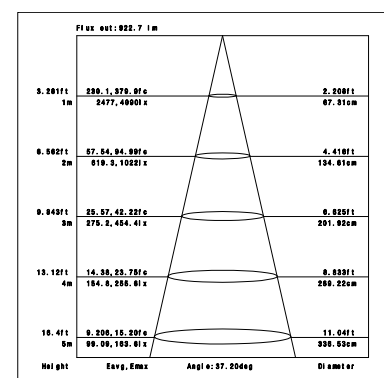


4000K

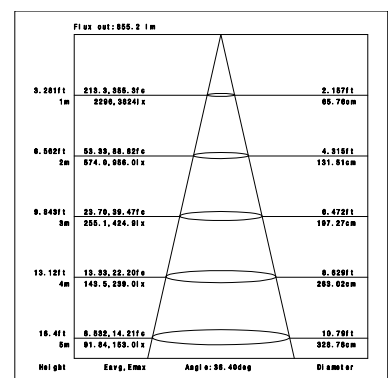


Installation instruction

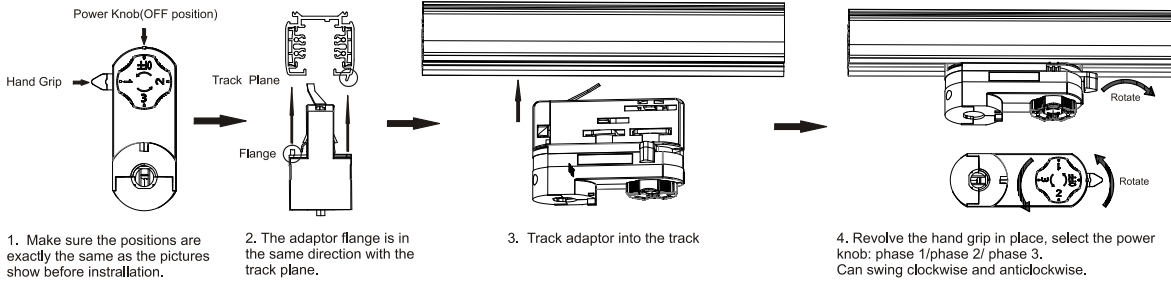


Remove Instructions

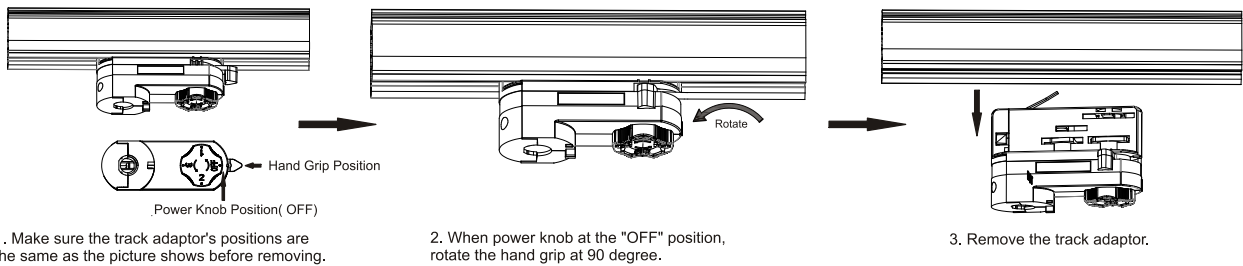


Cautions

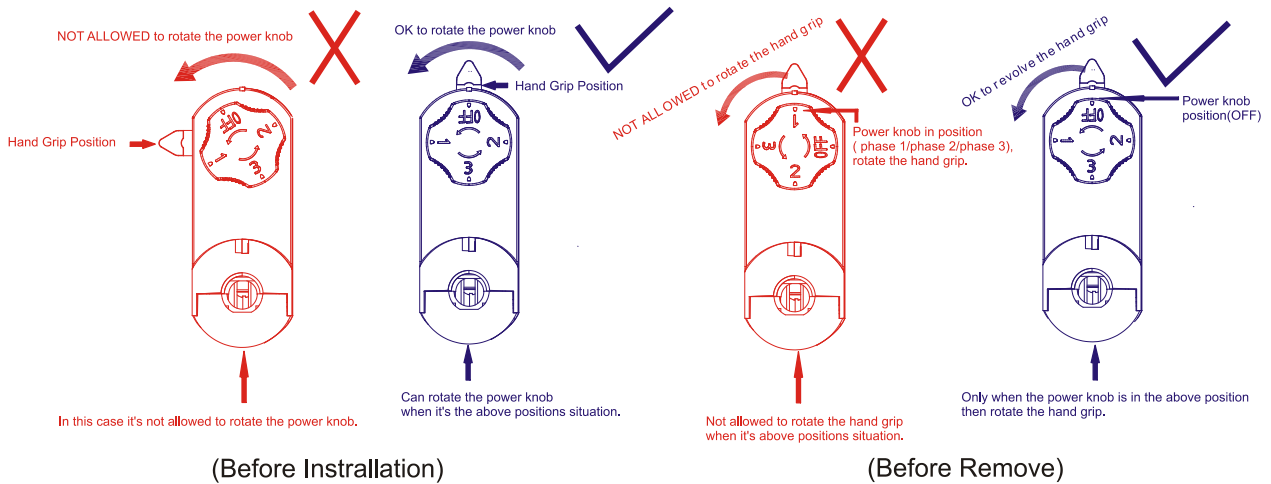

Packaging:

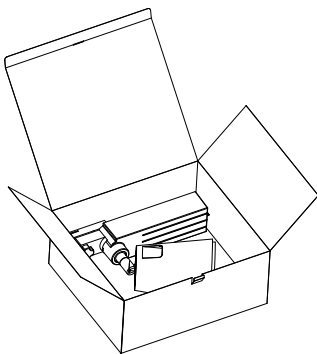

Box
L288*W256H120mm
1pc/box
GW: 1.35kg/box



Outer carton
L600XW540xH265mm
8pcs/CTN
GW: 12kg/carton

Product Nomenclature

