


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: Rayconn	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.10 lm/W			
MODEL	M031-11W-930-S-28	Imax(cd)	1678	S/MH(C0/180)	0.43
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.40
RATED VOLTAGE(V)	226	TOTAL FLUX(lm)	846.39	η UP,DN(C0-180)	1.2,48.8
NOMINAL FLUX(lm)	846.384	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.2,48.8
LAMPS INSIDE	1	η up(%)	2.4	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	226.5	η down(%)	97.6	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

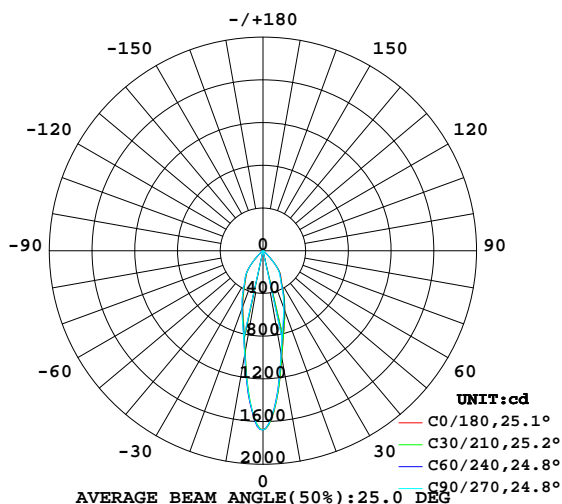

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

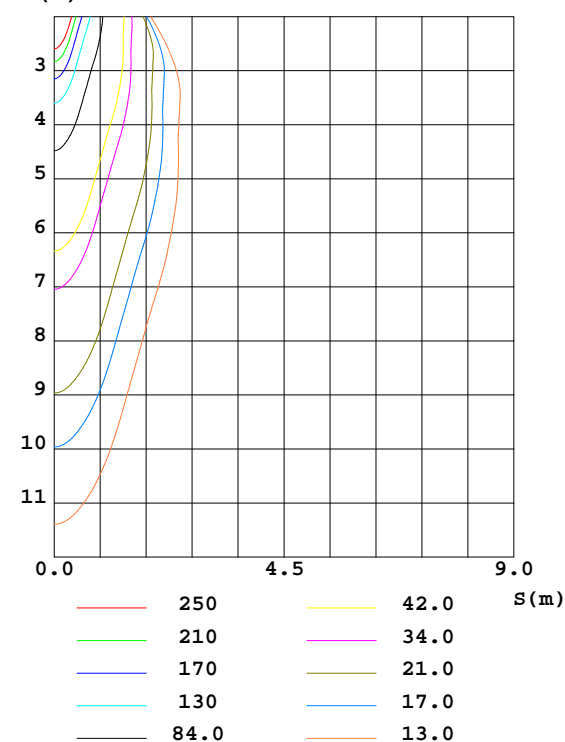

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZhangXiao  
Test Date:2015-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity:65.0%  
Test Distance:6.590m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	1015	997.7	977.8	969.0	969.2	976.5	986.1	1011	0- 10	120.8	120.8	14.3,14.3
20	596.1	589.0	570.0	555.0	553.6	566.0	578.1	593.6	10- 20	206.0	326.8	38.6,38.6
30	352.1	345.3	336.3	334.8	332.5	342.7	349.1	352.8	20- 30	206.0	532.9	63,63
40	215.0	208.2	200.9	193.3	196.8	194.4	200.3	209.1	30- 40	173.4	706.2	83.4,83.4
50	29.73	30.37	30.59	29.96	29.44	28.54	28.95	29.82	40- 50	75.24	781.5	92.3,92.3
60	15.18	15.16	15.37	15.31	15.12	14.88	14.68	15.00	50- 60	18.41	799.9	94.5,94.5
70	9.302	9.325	9.410	9.721	9.815	9.636	9.443	9.275	60- 70	12.08	812.0	95.9,95.9
80	6.339	6.421	6.486	7.137	7.449	7.193	6.974	6.392	70- 80	8.506	820.5	96.9,96.9
90	1.416	1.384	1.386	1.382	1.659	1.618	1.682	1.616	80- 90	5.605	826.1	97.6,97.6
100	1.505	1.509	1.520	1.527	1.912	1.887	1.891	1.870	90-100	1.728	827.8	97.8,97.8
110	1.916	1.931	1.953	1.973	2.321	2.301	2.281	2.269	100-110	2.000	829.8	98,98
120	2.543	2.563	2.598	2.627	2.937	2.907	2.866	2.845	110-120	2.387	832.2	98.3,98.3
130	3.471	3.494	3.532	3.577	3.822	3.785	3.742	3.707	120-130	2.829	835.0	98.7,98.7
140	4.565	4.587	4.625	4.664	4.835	4.795	4.750	4.724	130-140	3.225	838.3	99,99
150	5.325	5.338	5.362	5.385	5.503	5.470	5.442	5.432	140-150	3.182	841.4	99.4,99.4
160	5.864	5.864	5.878	5.891	5.991	5.966	5.943	5.953	150-160	2.618	844.1	99.7,99.7
170	6.232	6.232	6.229	6.232	6.304	6.279	6.261	6.280	160-170	1.725	845.8	99.9,99.9
180	6.399	6.393	6.390	6.403	6.418	6.395	6.385	6.402	170-180	0.6026	846.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZhangXiao  
Test Date:2015-12-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 $\gamma$  Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity:65.0%  
Test Distance:6.590m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: Rayconn	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.09	1.07	1.04	1.07	1.04	1.02	1.02	1.00	.99	.98	.97	.95	.94	.93	.92	.90
2.0	1.01	.97	.93	.99	.95	.92	.95	.92	.89	.92	.89	.87	.89	.87	.85	.83
3.0	.94	.88	.84	.92	.87	.83	.89	.85	.82	.86	.83	.80	.84	.81	.79	.77
4.0	.87	.81	.77	.86	.81	.76	.84	.79	.75	.81	.77	.74	.79	.76	.73	.71
5.0	.82	.75	.71	.80	.75	.71	.78	.73	.70	.76	.72	.69	.75	.71	.68	.66
6.0	.76	.70	.66	.76	.70	.65	.74	.69	.65	.72	.68	.64	.71	.67	.64	.62
7.0	.72	.66	.61	.71	.65	.61	.70	.64	.61	.68	.64	.60	.67	.63	.60	.58
8.0	.68	.62	.57	.67	.61	.57	.66	.61	.57	.65	.60	.56	.63	.59	.56	.55
9.0	.64	.58	.54	.63	.58	.54	.62	.57	.53	.61	.57	.53	.60	.56	.53	.51
10.0	.61	.55	.51	.60	.55	.51	.59	.54	.50	.58	.54	.50	.57	.53	.50	.49

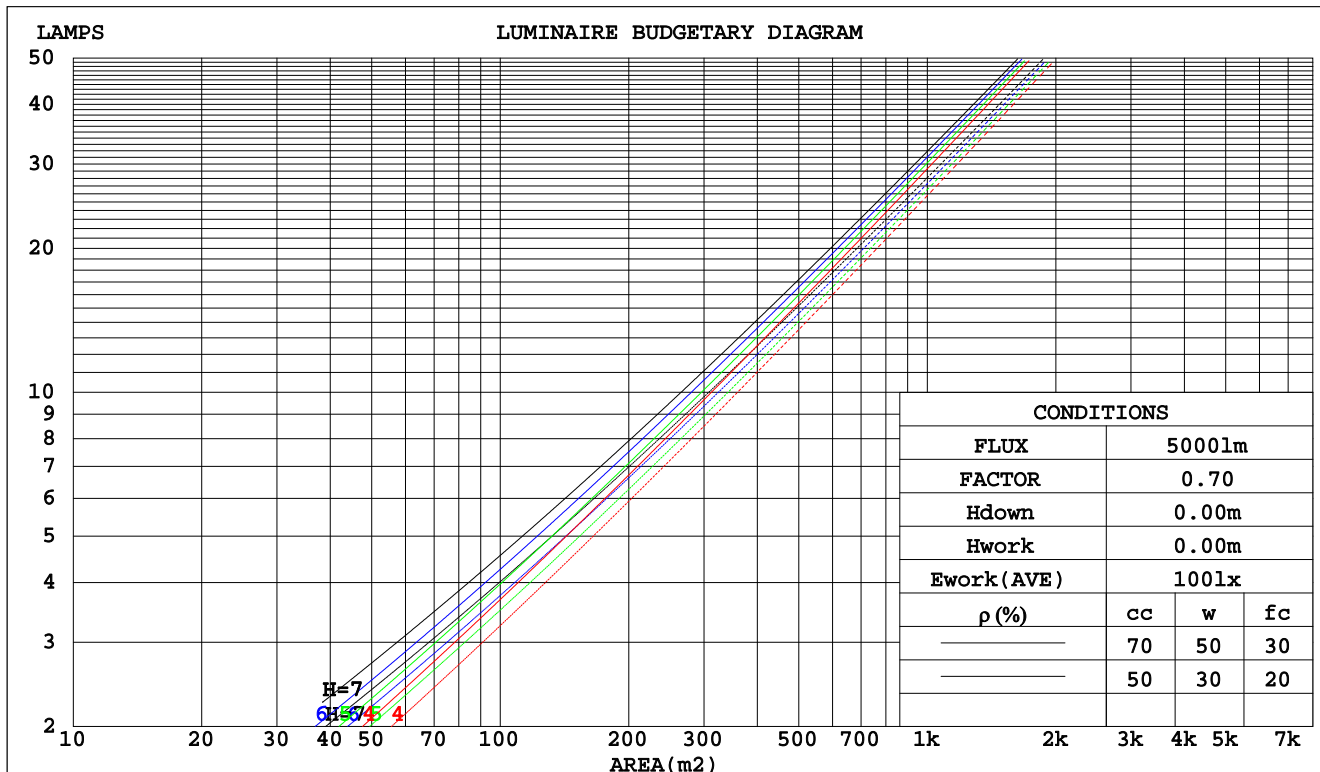

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZhangXiao  
Test Date:2015-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity:65.0%  
Test Distance:6.590m [K=1.0000]  
Remarks:

**WEC AND CCEC**

Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm									
NAME:				TYPE:				WEIGHT:	
DIM.:				SPEC.:				SERIAL No.:	
MFR.: Rayconn				SUR.:				PROTECTION ANGLE:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.196	.111	.035	.188	.107	.034	.174	.100	.032	.161	.093	.030	.149	.087	.028	
2.0	.185	.101	.031	.178	.098	.030	.166	.092	.029	.155	.087	.027	.145	.082	.026	
3.0	.174	.093	.028	.169	.090	.027	.158	.086	.026	.149	.081	.025	.140	.077	.024	
4.0	.164	.085	.025	.160	.083	.025	.150	.080	.024	.142	.076	.023	.134	.073	.022	
5.0	.155	.079	.023	.151	.078	.023	.143	.075	.022	.136	.072	.021	.129	.069	.021	
6.0	.147	.074	.021	.144	.073	.021	.137	.070	.020	.130	.068	.020	.124	.065	.019	
7.0	.140	.069	.020	.137	.068	.019	.130	.066	.019	.124	.064	.019	.119	.062	.018	
8.0	.133	.065	.018	.130	.064	.018	.125	.062	.018	.119	.060	.017	.114	.059	.017	
9.0	.127	.061	.017	.124	.061	.017	.119	.059	.017	.114	.057	.016	.110	.056	.016	
10.0	.121	.058	.016	.119	.057	.016	.114	.056	.016	.110	.055	.016	.106	.053	.015	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022		
1.0	.191	.176	.162	.163	.151	.139	.112	.104	.096	.064	.060	.056	.021	.019	.018		
2.0	.176	.151	.130	.151	.130	.112	.104	.090	.078	.060	.052	.046	.019	.017	.015		
3.0	.165	.132	.107	.141	.114	.092	.097	.079	.065	.056	.046	.038	.018	.015	.013		
4.0	.155	.118	.090	.133	.102	.078	.091	.071	.055	.053	.042	.032	.017	.014	.011		
5.0	.146	.106	.077	.125	.092	.067	.086	.064	.047	.050	.038	.028	.016	.012	.009		
6.0	.139	.097	.068	.119	.084	.059	.082	.059	.042	.048	.035	.025	.015	.011	.008		
7.0	.132	.090	.060	.114	.078	.052	.079	.055	.037	.046	.032	.022	.015	.011	.007		
8.0	.126	.084	.054	.109	.073	.047	.075	.051	.034	.044	.030	.020	.014	.010	.007		
9.0	.121	.078	.050	.104	.068	.043	.072	.048	.031	.042	.028	.018	.014	.009	.006		
10.0	.116	.074	.046	.100	.064	.040	.070	.045	.029	.041	.027	.017	.013	.009	.006		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZhangXiao  
Test Date:2015-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity:65.0%  
Test Distance:6.590m [K=1.0000]  
Remarks:

### Uncorrected UGR Table

Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm											
NAME:					TYPE:			WEIGHT:			
DIM.:					SPEC.:			SERIAL No.:			
MFR.: Rayconn					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	23.8	24.8	24.1	25.0	25.3	23.6	24.6	23.8	24.8	25.0
	3H	23.9	24.8	24.2	25.0	25.3	23.6	24.5	23.9	24.8	25.0
	4H	23.9	24.8	24.3	25.1	25.3	23.7	24.6	24.0	24.8	25.1
	6H	24.1	24.9	24.4	25.2	25.4	23.8	24.6	24.2	24.9	25.2
	8H	24.2	24.9	24.5	25.2	25.5	23.9	24.7	24.3	25.0	25.3
	12H	24.3	25.0	24.7	25.4	25.7	24.1	24.8	24.5	25.2	25.5
4H	2H	23.7	24.5	24.0	24.8	25.1	23.4	24.3	23.7	24.5	24.8
	3H	23.8	24.5	24.2	24.9	25.2	23.6	24.3	23.9	24.6	24.9
	4H	24.0	24.6	24.3	25.0	25.3	23.7	24.4	24.1	24.7	25.1
	6H	24.2	24.8	24.6	25.2	25.6	24.0	24.6	24.4	25.0	25.4
	8H	24.4	24.9	24.8	25.3	25.7	24.2	24.7	24.6	25.1	25.6
	12H	24.6	25.1	25.1	25.6	26.0	24.5	25.0	24.9	25.4	25.8
8H	4H	23.9	24.5	24.4	24.9	25.3	23.7	24.3	24.2	24.7	25.1
	6H	24.3	24.8	24.8	25.2	25.7	24.1	24.6	24.6	25.0	25.5
	8H	24.6	25.0	25.1	25.5	26.0	24.5	24.9	24.9	25.3	25.8
	12H	25.1	25.4	25.6	25.9	26.4	24.9	25.3	25.4	25.7	26.3
12H	4H	23.9	24.4	24.4	24.8	25.3	23.7	24.2	24.2	24.6	25.1
	6H	24.4	24.8	24.9	25.2	25.7	24.2	24.6	24.7	25.0	25.5
	8H	24.7	25.1	25.2	25.6	26.1	24.6	24.9	25.1	25.4	25.9
Variations with the observer position at spacings:											
S = 1.0H	+ 1.7 / - 3.1					+ 1.7 / - 3.0					
1.5H	+ 3.5 / - 3.2					+ 3.3 / - 2.9					
2.0H	+ 3.6 / - 0.9					+ 3.4 / - 0.8					

CIE Pub.117 Corrected 846.4 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.6)

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZhangXiao  
Test Date:2015-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity:65.0%  
Test Distance:6.590m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: Rayconn	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	81	74	70	81	74	70	80	73	69	65
0.80	89	82	78	88	82	78	87	81	77	73
1.00	95	88	84	94	87	83	92	87	83	78
1.25	99	93	89	98	92	88	96	91	87	82
1.50	102	97	93	101	96	92	98	94	91	85
2.00	106	101	97	104	99	96	101	97	94	88
2.50	108	103	100	106	102	99	102	99	96	89
3.00	109	105	102	107	104	101	104	101	98	91
4.00	112	108	106	109	107	104	105	103	101	93
5.00	113	110	108	111	108	106	106	104	103	94
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZhangXiao  
Test Date:2015-12-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 $\gamma$  Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity:65.0%  
Test Distance:6.590m [K=1.0000]  
Remarks:

### ISOCANDELA DIAGRAM

Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: Rayconn	SUR.:	PROTECTION ANGLE:

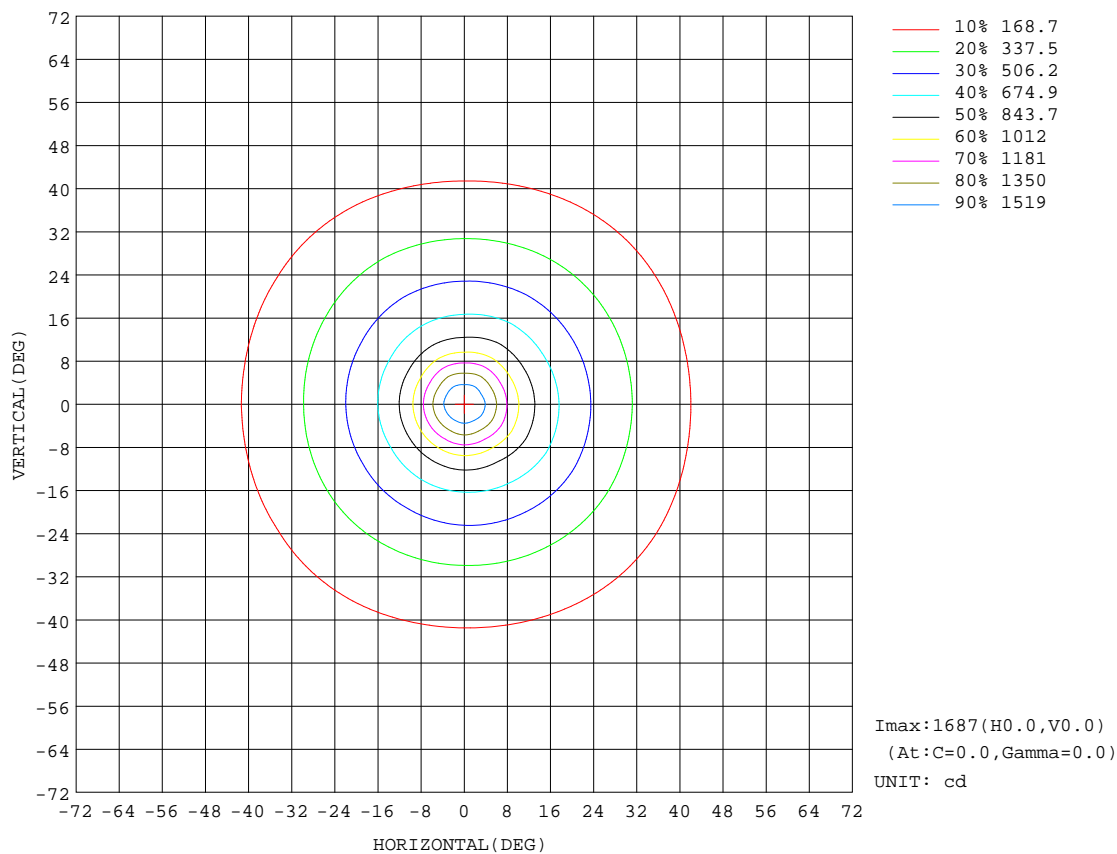


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZhangXiao  
Test Date:2015-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity:65.0%  
Test Distance:6.590m [K=1.0000]  
Remarks:

### AAI Figure

Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: Rayconn	SUR.:	PROTECTION ANGLE:

Flux out:179.4 lm

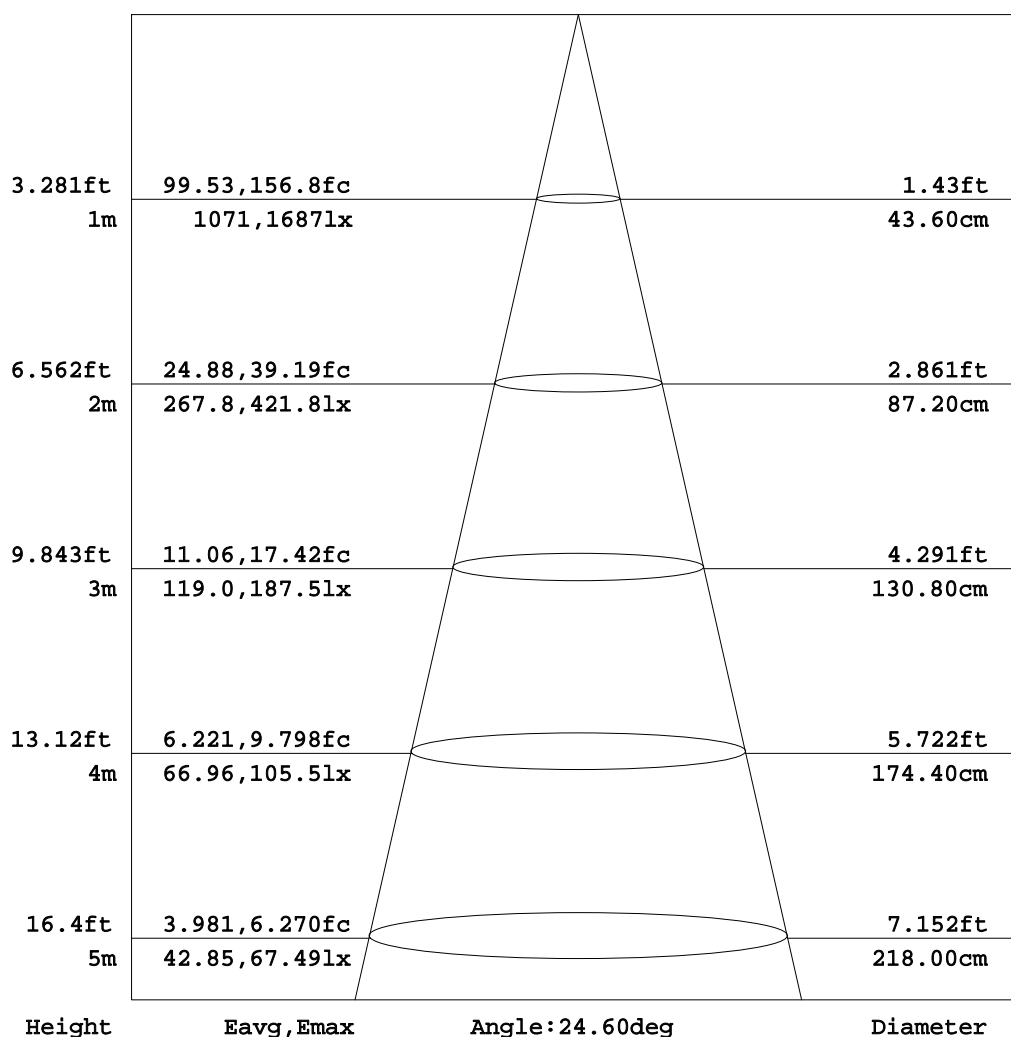

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: ZhangXiao  
Test Date: 2015-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity: 65.0%  
Test Distance: 6.590m [K=1.0000]  
Remarks:



## ISOLUX DIAGRAM


Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm		
NAME:	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: Rayconn	SUR.:	PROTECTION ANGLE:

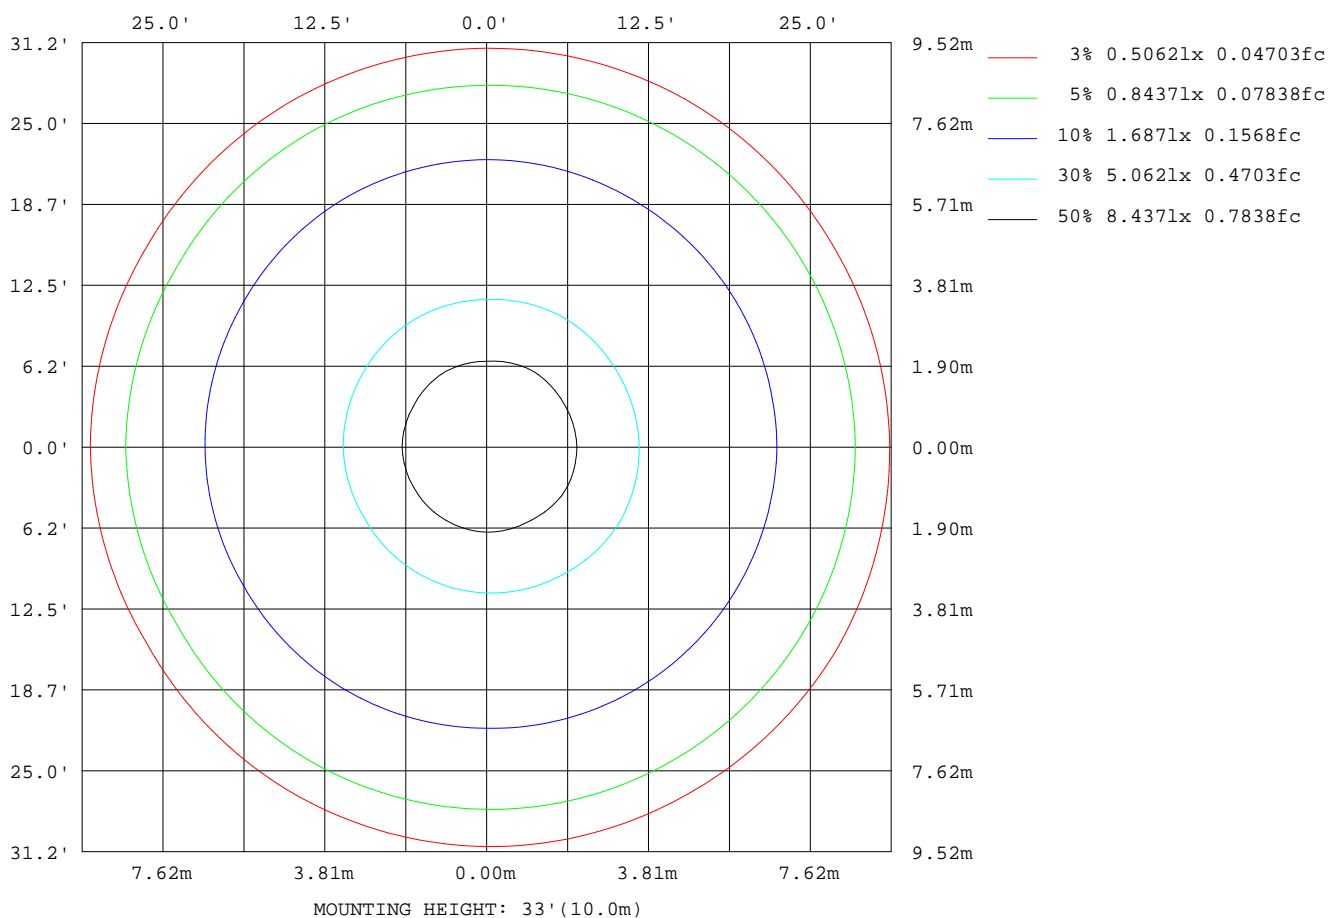

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: ZhangXiao  
Test Date: 2015-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity: 65.0%  
Test Distance: 6.590m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

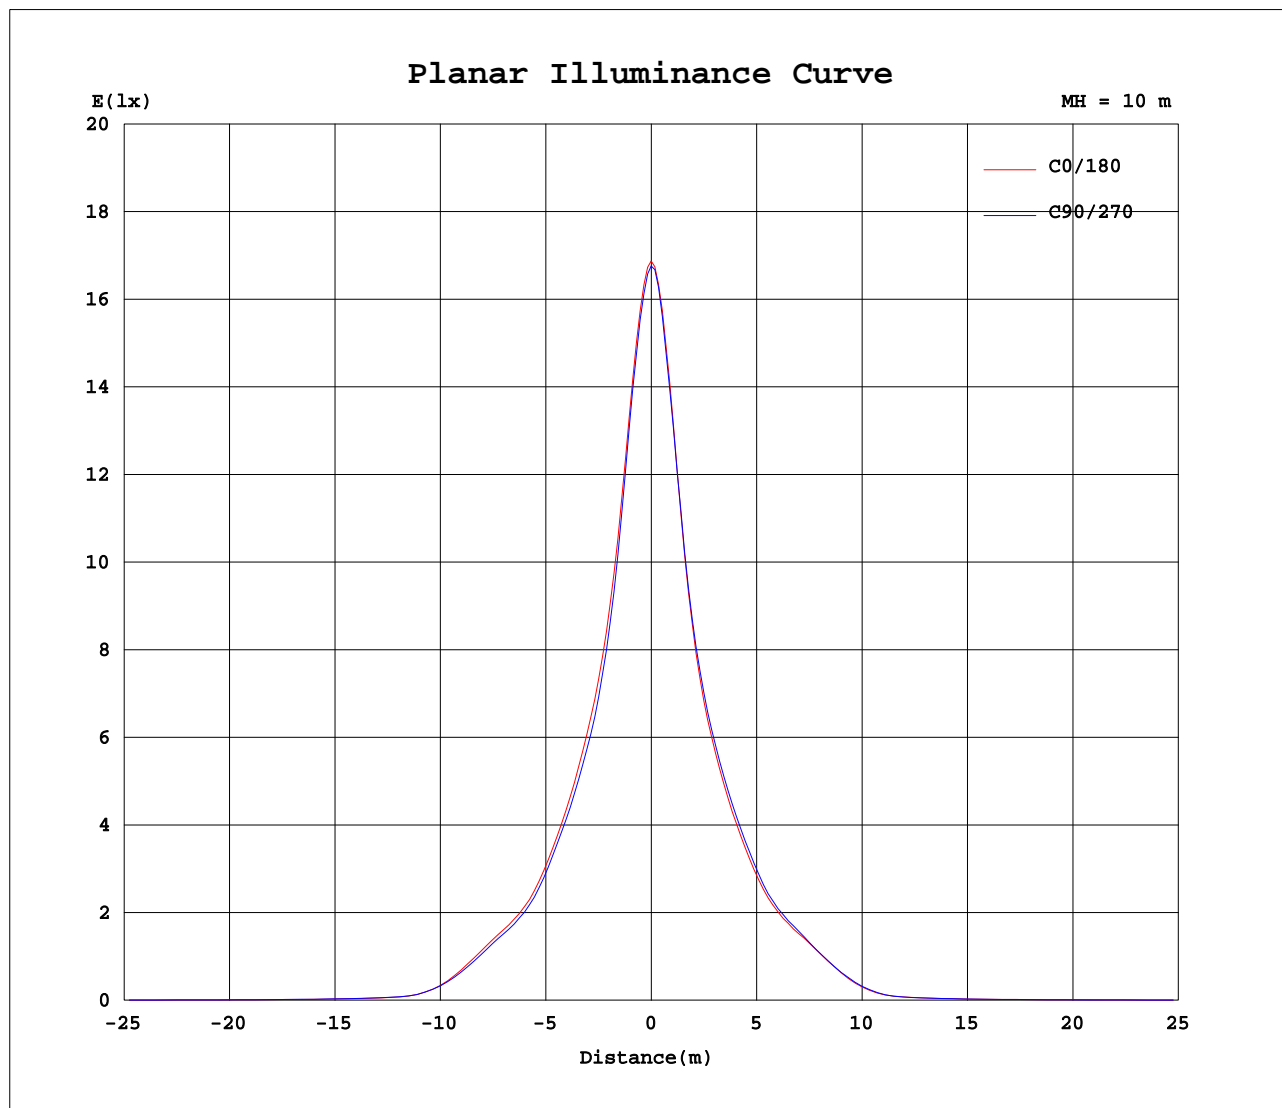

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: ZhangXiao  
Test Date: 2015-12-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity: 65.0%  
Test Distance: 6.590m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:226.5V I:0.0600A P:10.70W PF:0.7900 Lamp Flux:846.384x1 lm																	
NAME:									TYPE:						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:		
MFR.: Rayconn									SUR.:						PROTECTION ANGLE:		

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1678	1678	1678	1678	1678	1678	1678	1678	1678	1678	1678	1678						
5	1426	1426	1404	1413	1402	1414	1418	1407	1426	1412	1435	1425						
10	1015	1015	980	978	970	968	969	965	988	986	1013	1009						
15	758	760	730	719	711	705	706	706	726	731	756	754						
20	596	599	579	570	559	551	554	559	573	578	594	594						
25	465	464	453	446	435	432	431	438	453	455	464	466						
30	352	349	342	336	335	335	332	338	348	349	352	354						
35	292	286	283	276	278	273	275	278	284	287	288	292						
40	215	211	206	201	197	190	197	191	197	200	206	212						
45	95.9	101	95.1	93.2	87.7	83.0	86.0	84.2	89.8	91.0	95.0	92.7						
50	29.7	30.7	30.1	30.6	29.4	30.5	29.4	28.2	28.9	28.9	29.6	30.0						
55	19.8	20.5	20.4	20.6	20.0	20.3	19.7	19.4	19.5	19.4	19.7	19.8						
60	15.2	15.2	15.2	15.4	15.1	15.5	15.1	14.8	14.9	14.7	14.9	15.1						
65	12.2	12.1	12.1	12.3	12.2	12.6	12.3	12.1	12.2	12.0	12.0	12.2						
70	9.30	9.38	9.27	9.41	9.49	9.95	9.81	9.61	9.66	9.44	9.31	9.24						
75	7.67	7.78	7.64	7.76	8.06	8.52	8.52	8.30	8.32	8.08	7.80	7.61						
80	6.34	6.51	6.34	6.49	6.90	7.37	7.45	7.20	7.19	6.97	6.55	6.24						
85	5.20	5.44	5.26	5.42	5.86	6.30	6.41	6.06	6.06	5.95	5.43	5.06						
90	1.42	1.38	1.39	1.39	1.38	1.38	1.66	1.62	1.62	1.68	1.61	1.62						
95	1.43	1.41	1.39	1.42	1.40	1.42	1.76	1.74	1.74	1.74	1.73	1.71						
100	1.50	1.51	1.51	1.52	1.52	1.53	1.91	1.88	1.89	1.89	1.88	1.86						
105	1.68	1.69	1.69	1.71	1.71	1.72	2.10	2.07	2.08	2.06	2.06	2.05						
110	1.92	1.93	1.93	1.95	1.97	1.98	2.32	2.30	2.30	2.28	2.27	2.26						
115	2.21	2.22	2.22	2.25	2.26	2.28	2.60	2.58	2.57	2.55	2.54	2.52						
120	2.54	2.55	2.57	2.60	2.62	2.64	2.94	2.92	2.90	2.87	2.85	2.84						
125	2.96	2.97	3.01	3.03	3.05	3.07	3.34	3.31	3.30	3.27	3.24	3.23						
130	3.47	3.48	3.51	3.53	3.57	3.59	3.82	3.79	3.77	3.74	3.71	3.70						
135	4.03	4.04	4.08	4.10	4.14	4.15	4.35	4.32	4.30	4.26	4.23	4.23						
140	4.57	4.57	4.60	4.63	4.66	4.67	4.83	4.80	4.79	4.75	4.73	4.72						
145	5.00	5.01	5.02	5.05	5.07	5.09	5.21	5.17	5.17	5.14	5.12	5.12						
150	5.33	5.33	5.34	5.36	5.38	5.39	5.50	5.47	5.47	5.44	5.44	5.43						
155	5.61	5.61	5.62	5.63	5.64	5.66	5.76	5.73	5.73	5.71	5.71	5.69						
160	5.86	5.86	5.86	5.88	5.88	5.90	5.99	5.96	5.97	5.94	5.95	5.95						
165	6.07	6.07	6.08	6.07	6.08	6.09	6.17	6.14	6.15	6.13	6.14	6.14						
170	6.23	6.24	6.23	6.23	6.22	6.24	6.30	6.27	6.28	6.26	6.29	6.27						
175	6.33	6.32	6.31	6.32	6.32	6.33	6.37	6.35	6.36	6.34	6.36	6.35						
180	6.40	6.40	6.38	6.39	6.40	6.41	6.42	6.39	6.40	6.39	6.40	6.40						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: ZhangXiao  
Test Date: 2015-12-07

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.265  
Humidity: 65.0%  
Test Distance: 6.590m [K=1.0000]  
Remarks: