


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm					
NAME: M20-T41006B-36G40-L24			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.: 652*21.6		Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 76.21 lm/W
MODEL	4000K CRI90	I _{max} (cd)	9813	S/MH(C0/180)	0.45	
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	0.57	
RATED VOLTAGE(V)	226	TOTAL FLUX(lm)	2727.4	η UP,DN(C0-180)	0.0,39.9	
NOMINAL FLUX(lm)	2727.38	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,60.1	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	225.1	η down(%)	100.0	CIBSE SHR MAX	0.50	

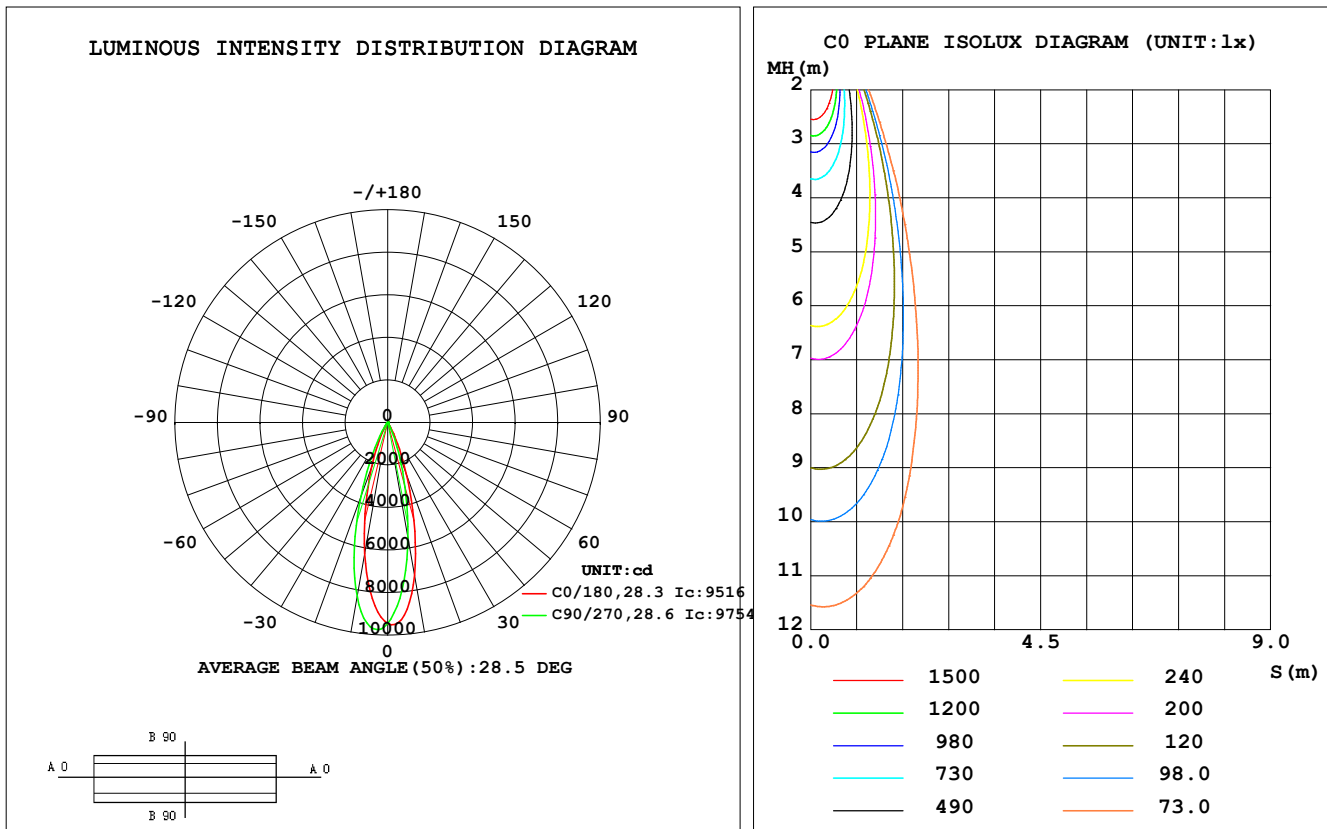

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ZR
Test Date: 2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity: 65.0%
Test Distance: 8.402m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	7295	6143	5497	5520	6270	7345	8296	8412	0- 10	771.9	771.9	28.3,28.3
20	2582	1810	1504	1627	2209	2952	3687	3722	10- 20	1227	1999	73.3,73.3
30	384.9	228.6	170.9	218.7	389.6	549.9	763.5	791.5	20- 30	549.6	2548	93.4,93.4
40	34.67	24.13	24.73	34.76	83.82	97.21	107.5	104.4	30- 40	111.9	2660	97.5,97.5
50	7.370	3.883	3.957	5.142	34.66	39.04	39.56	36.92	40- 50	28.35	2688	98.6,98.6
60	3.014	3.147	3.222	3.211	17.93	19.33	20.34	20.04	50- 60	13.05	2701	99.1,99.1
70	3.793	3.907	3.967	3.911	13.01	14.04	14.63	14.45	60- 70	9.952	2711	99.4,99.4
80	4.336	4.344	4.377	4.334	9.594	10.35	10.74	10.56	70- 80	8.566	2720	99.7,99.7
90	4.711	4.769	4.840	4.783	7.372	7.816	8.128	8.022	80- 90	7.384	2727	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2677.3 lm

%lum = 98.2%

%lamp = 98.2%

Conical surface Flux(120deg): 2701.5 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ZR
 Test Date:2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.402m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm		
NAME: M20-T41006B-36G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:652*21.6	Shielding Angle:

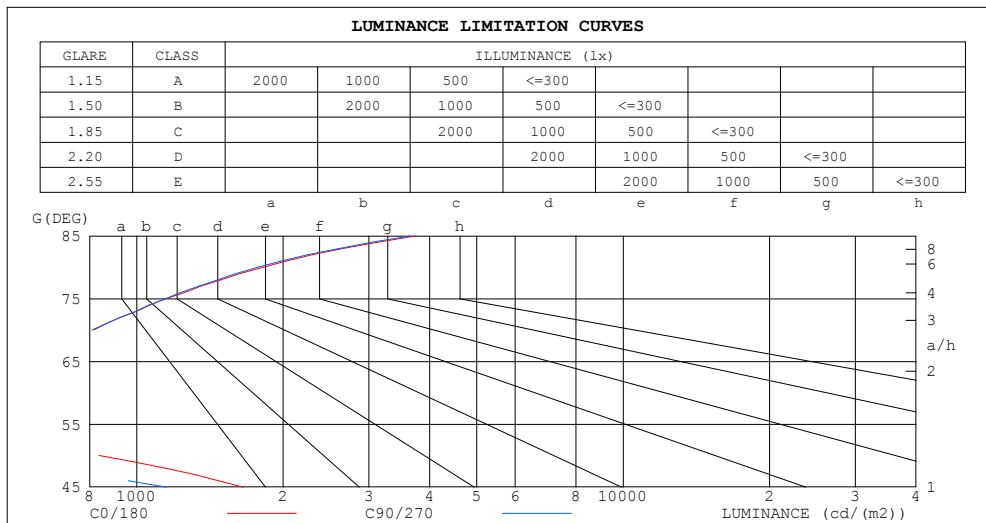

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3757	3658
80	1823	1773
75	1151	1148
70	809	816
65	593	604
60	440	453
55	423	343
50	837	433
45	1654	1149


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm		
NAME: M20-T41006B-36G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:652*21.6	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.07	1.03	1.01	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.90	.88
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.89	.85	.92	.88	.85	.91	.87	.84	.89	.86	.84	.88	.85	.83	.82
6.0	.90	.85	.82	.89	.85	.82	.88	.84	.81	.86	.83	.81	.85	.82	.80	.79
7.0	.86	.82	.79	.86	.81	.78	.85	.81	.78	.84	.80	.78	.83	.80	.77	.76
8.0	.83	.79	.76	.83	.79	.76	.82	.78	.75	.81	.78	.75	.80	.77	.75	.74
9.0	.81	.76	.73	.80	.76	.73	.79	.75	.73	.78	.75	.73	.78	.75	.72	.71
10.0	.78	.74	.71	.78	.73	.71	.77	.73	.70	.76	.73	.70	.76	.72	.70	.69

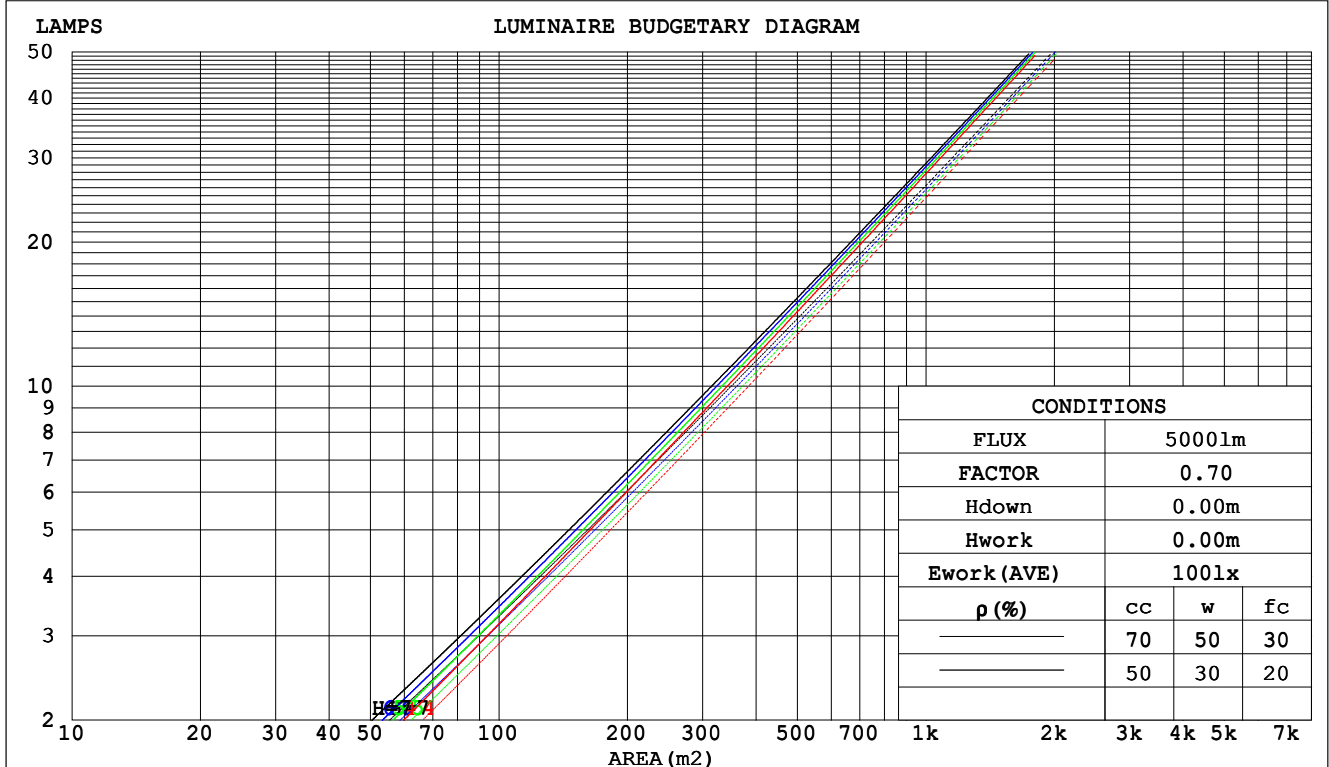

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm		
NAME: M20-T41006B-36G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:652*21.6	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.148	.084	.027	.142	.081	.026	.129	.074	.024	.118	.068	.022	.107	.062	.020	
2.0	.137	.075	.023	.132	.073	.022	.121	.067	.021	.112	.063	.020	.103	.058	.018	
3.0	.128	.068	.020	.123	.066	.020	.115	.062	.019	.107	.058	.018	.099	.055	.017	
4.0	.120	.062	.018	.116	.061	.018	.109	.058	.017	.102	.055	.017	.096	.052	.016	
5.0	.113	.058	.017	.110	.056	.016	.103	.054	.016	.098	.051	.015	.092	.049	.015	
6.0	.107	.054	.015	.104	.053	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014	
7.0	.102	.050	.014	.099	.049	.014	.095	.048	.014	.090	.046	.013	.086	.045	.013	
8.0	.097	.047	.013	.095	.047	.013	.091	.045	.013	.087	.044	.013	.083	.043	.012	
9.0	.093	.045	.013	.091	.044	.012	.087	.043	.012	.084	.042	.012	.080	.041	.012	
10.0	.089	.043	.012	.087	.042	.012	.084	.041	.012	.081	.040	.011	.078	.039	.011	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.078	.107	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.065	.099	.074	.056	.068	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.106	.076	.054	.091	.066	.047	.063	.046	.034	.037	.027	.020	.012	.009	.007	
7.0	.099	.068	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.092	.061	.040	.080	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.087	.056	.035	.075	.048	.030	.052	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.082	.051	.031	.071	.044	.027	.049	.031	.019	.029	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm											
NAME: M20-T41006B-36G40-L24					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.: 652*21.6			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	0.7	1.4	0.9	1.5	1.7	-2.6	-1.9	-2.4	-1.8	-1.6	
	3H	0.8	1.5	1.1	1.7	1.9	-2.0	-1.4	-1.8	-1.2	-1.0
	4H	1.1	1.8	1.4	2.0	2.2	-1.3	-0.6	-1.0	-0.4	-0.2
	6H	1.8	2.4	2.1	2.6	2.9	-0.0	0.6	0.3	0.8	1.0
	8H	2.4	2.9	2.7	3.2	3.4	0.9	1.4	1.2	1.7	1.9
	12H	3.2	3.7	3.5	4.0	4.2	2.0	2.5	2.3	2.8	3.1
4H	2H	0.5	1.1	0.8	1.4	1.6	-2.7	-2.0	-2.4	-1.8	-1.6
	3H	0.8	1.4	1.2	1.7	1.9	-1.7	-1.1	-1.4	-0.9	-0.6
	4H	1.4	1.9	1.7	2.2	2.5	-0.6	-0.1	-0.3	0.2	0.5
	6H	2.4	2.9	2.8	3.2	3.5	1.1	1.5	1.5	1.9	2.2
	8H	3.2	3.6	3.6	4.0	4.3	2.2	2.6	2.6	2.9	3.3
	12H	4.3	4.7	4.7	5.0	5.4	3.5	3.9	3.9	4.3	4.6
8H	4H	1.6	2.1	2.0	2.4	2.8	-0.1	0.4	0.3	0.7	1.1
	6H	3.0	3.4	3.4	3.8	4.2	2.0	2.3	2.4	2.7	3.1
	8H	4.1	4.4	4.5	4.8	5.2	3.3	3.6	3.7	4.0	4.5
	12H	5.4	5.7	5.9	6.1	6.6	4.9	5.1	5.3	5.6	6.1
12H	4H	1.7	2.1	2.1	2.5	2.9	0.1	0.5	0.5	0.9	1.2
	6H	3.2	3.6	3.7	4.0	4.4	2.3	2.6	2.7	3.0	3.4
	8H	4.4	4.7	4.9	5.1	5.6	3.7	4.0	4.2	4.4	4.9
Variations with the observer position at spacings:											
S = 1.0H	+ 1.1 / - 0.6					+ 0.4 / - 0.3					
1.5H	+ 2.3 / - 0.5					+ 0.7 / - 0.3					
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.2					

CIE Pub.117, 2727 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 3.5$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm		
NAME: M20-T41006B-36G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:652*21.6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	81	90	84	81	89	84	81	77
0.80	97	92	88	96	91	88	95	91	88	84
1.00	101	96	92	100	95	92	99	95	92	88
1.25	105	100	97	104	99	96	102	98	95	91
1.50	107	103	100	106	102	99	104	100	98	94
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	104	109	106	104	106	104	102	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm		
NAME: M20-T41006B-36G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:652*21.6	Shielding Angle:

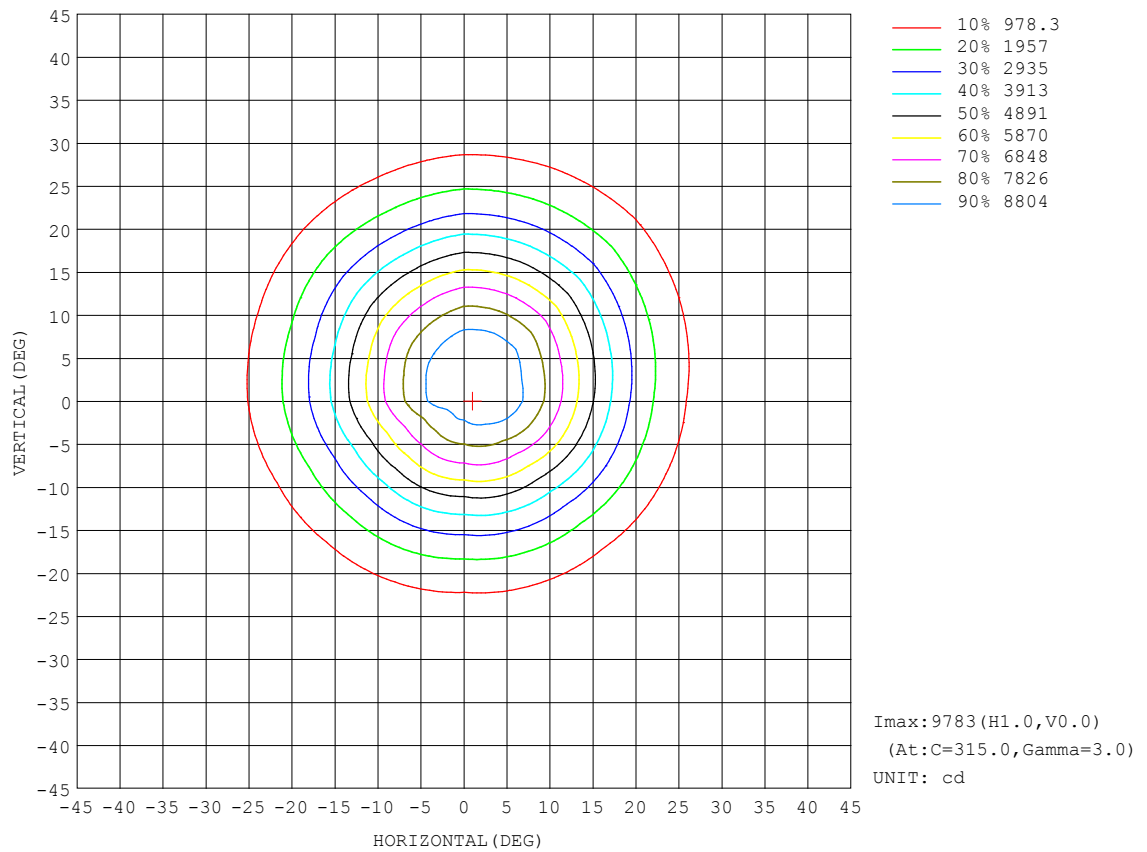


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: ZR
 Test Date: 2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity: 65.0%
 Test Distance: 8.402m [K=1.0000]
 Remarks:

AAI Figure

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm		
NAME: M20-T41006B-36G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:652*21.6	Shielding Angle:

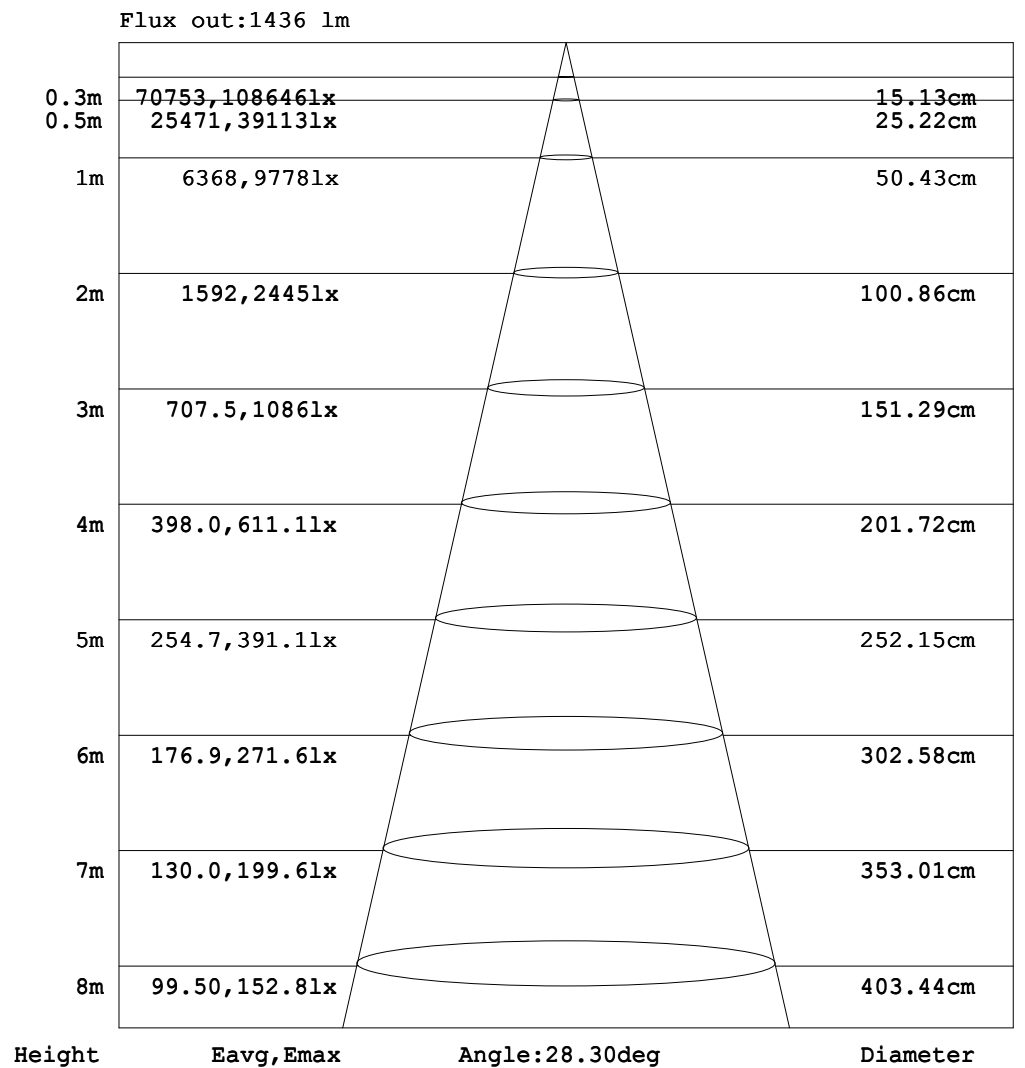


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ZR
Test Date: 2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity: 65.0%
Test Distance: 8.402m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm		
NAME: M20-T41006B-36G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 652*21.6	Shielding Angle:

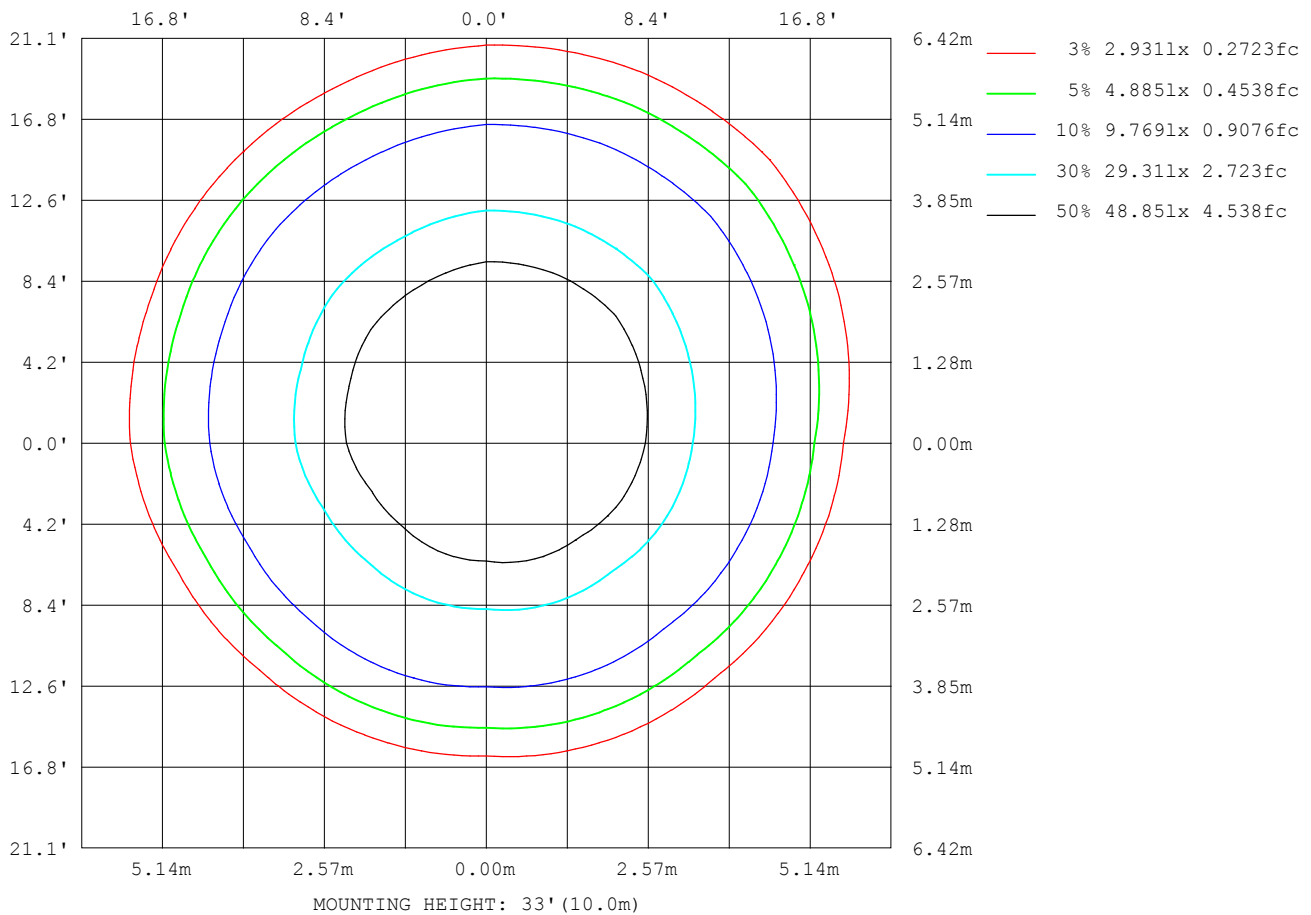

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-08-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:48.00V I:0.7456A P:35.79W PF:1.000 Freq:50.00Hz Lamp Flux:2727.38x1 lm		
NAME: M20-T41006B-36G40-L24	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:652*21.6	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1568
L_0~180 (75) av	2087
L_0~180 (85) av	5224
L_90~270 (65) av	1745
L_90~270 (75) av	2295
L_90~270 (85) av	5632
L_45 (65) av	1704
L_45 (75) av	2241
L_45 (85) av	5528

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ZR
 Test Date:2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.402m [K=1.0000]
 Remarks:

Planar Illuminance Curve

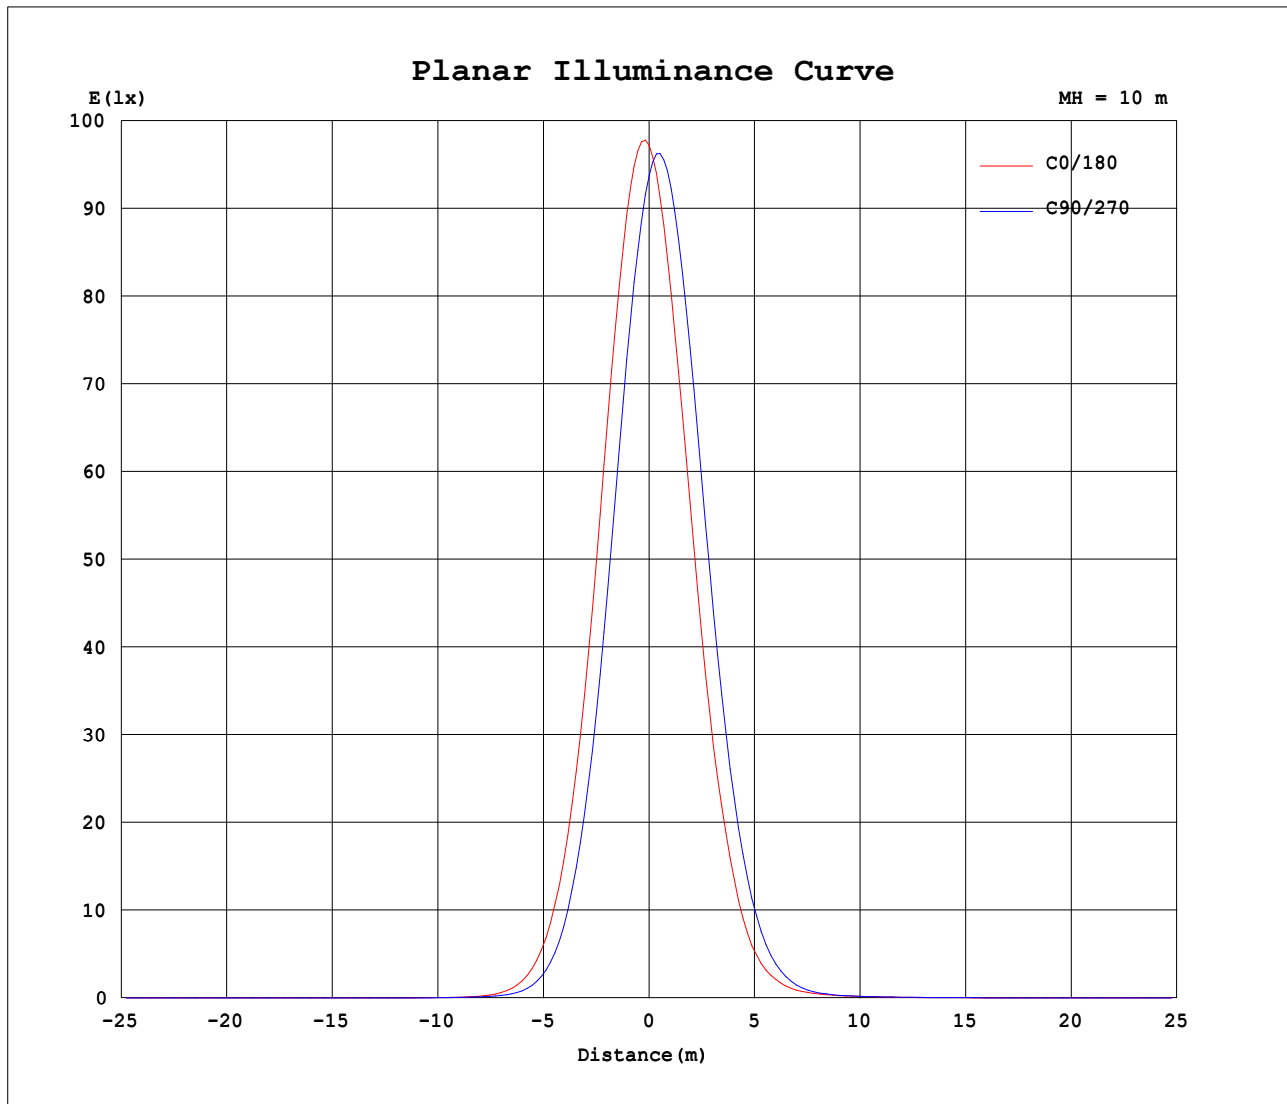

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ZR
Test Date: 2021-08-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity: 65.0%
Test Distance: 8.402m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

```