

Recessed Downlight

Norms: EN 60598-1, EN 60598-2-1, EN60598-2-2




Product information



Product number:	ALRP35 - 06
Input Voltage (v):	220-240V AC
Dimming:	On/Off, Triac, 1-10V, DALI
Light source:	COB LED
Luminaire Lifetime:	50.000h (L80-B10, Ta25° C)
Rotation Angle (degree):	N/A
Tilting Angle (degree):	N/A
IP Rating:	20
Working Temperature (° C)	-5 ~ +30
Storage Temperature (° C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black


Packaging information

N.W. lamp (Kg):	0.32
G.W. Carton (Kg):	13
Master carton dimensions(mm):	520x420x365
Quantity per carton(PCS):	32

Beam	Watt	CRI	Luminous	CCT	Code
17 	06W	90	556.7 lm	4000K	ALRP35S-02NC06G40-S
			525.2 lm	3000K	ALRP35S-02NC06G30-S
			488.4 lm	2700K	ALRP35S-02NC06G27-S
24 	06W	90	553.6 lm	4000K	ALRP35S-02NC06G40-M
			522.3 lm	3000K	ALRP35S-02NC06G30-M
			485.7 lm	2700K	ALRP35S-02NC06G27-M
34 	06W	90	555.2 lm	4000K	ALRP35S-02NC06G40-F
			523.8 lm	3000K	ALRP35S-02NC06G30-F
			487.1 lm	2700K	ALRP35S-02NC06G27-F



Cut hole ϕ 45mm

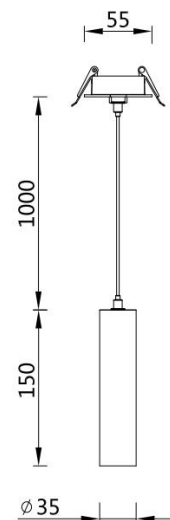

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

Code composition: ALRP 35 S - 02 N C 06 G30 - S - B - L01

① Product series	② Model	③ App types	④ Track style&length	⑤ Dimming type	⑥ COB type	⑦ Watt	⑧ LED Kelvin & CRI	⑨ Optical angle	⑩ Finishes	⑪ Accessories
ALRP	35	S Spotlight	02 150mm	N No dimming	C COB	06W	H27 2700 >95	S Spot	White	L01 Honeycomb
			04 400mm	T Triac dimming			G30 3000 >90	M Medium	Black	L02 Oval diffuser
			08 800mm	V 1-10V dimming			E40 4000 >80	F Flood		L03 Diffuser
				D DALI dimming			C50 5000 >70			