

Recessed Downlight

Norms: EN 60598-1, EN 60598-2-1, EN60598-2-2





Product information



Product number:	ALRP55 - 15
Input Voltage (v):	220-240V AC
Dimming:	On/Off, Triac, 1-10V, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25° C)
Rotation Angle (degree):	N/A
Tilting Angle (degree):	N/A
IP Rating:	20
Working Temperature (° C)	-5 ~ +30
Storage Temperature (° C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black

Packaging information


N.W. lamp (Kg):	0.53
G.W. Carton (Kg):	19
Master carton dimensions(mm):	520x420x365
Quantity per carton(PCS):	32

Beam	Watt	CRI	Luminous	CCT	Code
15 	15W	90	1120.2 lm	4000K	ALRP55S-02NC15G40-S
			1056.8 lm	3000K	ALRP55S-02NC15G30-S
			982.8 lm	2700K	ALRP55S-02NC15G27-S
21 	15W	90	1070.8 lm	4000K	ALRP55S-02NC15G40-M
			1010.2 lm	3000K	ALRP55S-02NC15G30-M
			939.5 lm	2700K	ALRP55S-02NC15G27-M
36 	15W	90	908.7 lm	4000K	ALRP55S-02NC15G40-F
			857.3 lm	3000K	ALRP55S-02NC15G30-F
			797.3 lm	2700K	ALRP55S-02NC15G27-F
49 	15W	90	973.2 lm	4000K	ALRP55S-02NC15G40-WF
			918.1 lm	3000K	ALRP55S-02NC15G30-WF
			853.8 lm	2700K	ALRP55S-02NC15G27-WF



Honeycomb Oval diffuser Diffuser Anti-glare ring

Cut hole ϕ 75mm

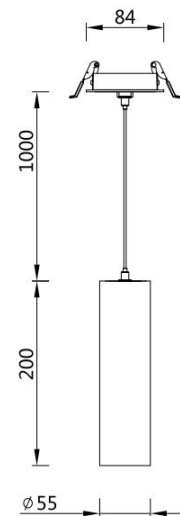

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

Code composition: ALRP 55 S - 02 N C 15 G30 - S - B - L01

① Product series	② Model	③ App types	④ Track style&length	⑤ Dimming type	⑥ COB type	⑦ Watt	⑧ LED Kelvin & CRI	⑨ Optical angle	⑩ Finishes	⑪ Accessories						
ALRP	55	S	Spotlight 02	200mm	N	No dimming	C	COB	15W	H27	2700 >95	S	Spot	White	L01	Honeycomb
			03	255mm	T	Triac dimming		G30	3000 >90	M	Medium		Black	L02	Oval diffuser	
			06	600mm	V	1-10V dimming		E40	4000 >80	F	Flood			L03	Diffuser	
					D	DALI dimming		C50	5000 >70	WF	Wide Flood			L04	Anti-glare ring	