

Recessed Downlight

Product information




Product number:	ALST55 - 15
Input Voltage (v):	220-240V AC
Dimming:	On/Off, Triac, 1-10V, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25° C)
Rotation Angle (degree):	350
Tilting Angle (degree):	90
IP Rating:	20
Working Temperature (° C)	-5 ~ +30
Storage Temperature (° C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black



Packaging information

N.W. lamp (Kg):	0.62
G.W. Carton (Kg):	15
Master carton dimensions(mm):	720x295x328
Quantity per carton(PCS):	20

Beam	Watt	CRI	Luminous	CCT	Code
15	15W	90	1120.2 lm	4000K	ALST55S-NC15G40-S
			1056.8 lm	3000K	ALST55S-NC15G30-S
			982.8 lm	2700K	ALST55S-NC15G27-S
21	15W	90	1070.8 lm	4000K	ALST55S-NC15G40-M
			1010.2 lm	3000K	ALST55S-NC15G30-M
			939.5 lm	2700K	ALST55S-NC15G27-M
36	15W	90	908.7 lm	4000K	ALST55S-NC15G40-F
			857.3 lm	3000K	ALST55S-NC15G30-F
			797.3 lm	2700K	ALST55S-NC15G27-F
49	15W	90	973.0 lm	4000K	ALST55S-NC15G40-WF
			918.0 lm	3000K	ALST55S-NC15G30-WF
			853.7 lm	2700K	ALST55S-NC15G27-WF

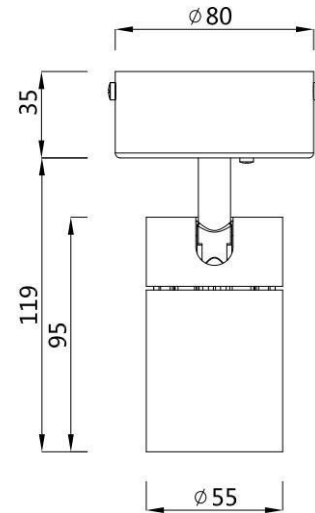

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

Code composition: ALST 55 S - N C 15G30-S-B-L01 - -

① Product series	② Model	③ App types	④ Dimming type	⑤ COB type	⑥ Watt	⑦ LED Kelvin & CRI	⑧ Optical angle	⑨ Finishes	⑩ Accessories
ALST	55	S Spotlight N	No dimming T Triac dimming V 1-10V dimming D DALI dimming	C COB	15W	H27 2700 >95 S G30 3000 >90 M E40 4000 >80 F C50 5000 >70 WF	Spot Medium Flood Wide Flood	White Black	L01 Honeycomb L02 Oval diffuser L03 Diffuser L04 Anti-glare ring