



IMS Series

IMS-GL02 1x20W/2x20W/3X20W

Reflector+Lens

Technical Parameters:

Name	Parameters		
Light source:	COB		
Input Voltage:	AC220~240V 50/60Hz		
Current: (Adjustable)	500mA	500mA	500mA
	1x20W	2x20w	3x20w
Rated life:	>50,000 hours		
Operating temperature:	-20℃~40℃		
Storage temperature:	-30℃~60℃		
Certificate:			
Dimmability:	Dimmable Optional		

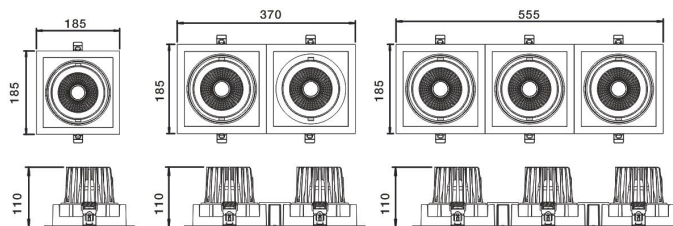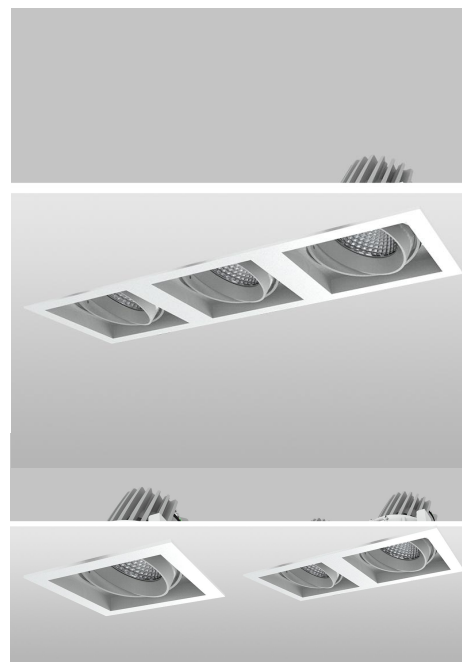

Ordering Information:


○ Silver gray

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number		
1x20W	80	▲ 15°	2217 lm	3000K	○	IMS-GL0211-20W-830-S-15		
			2340 lm	4000K	○	IMS-GL0211-20W-840-S-15		
		▲ 24°	2175 lm	3000K	○	IMS-GL0211-20W-830-S-24		
			2310 lm	4000K	○	IMS-GL0211-20W-840-S-24		
		▲ 40°	2217 lm	3000K	○	IMS-GL0211-20W-830-S-40		
			2313 lm	4000K	○	IMS-GL0211-20W-840-S-40		
	>90	▲ 15°	1993 lm	3000K	○	IMS-GL0211-20W-930-S-15		
			1963 lm	3000K	○	IMS-GL0211-20W-930-S-24		
		▲ 24°	1978 lm	3000K	○	IMS-GL0211-20W-930-S-40		
		2x20W	>80	▲ 15°	3545 lm	3000K	○	IMS-GL0221-20W-830-S-15
					3740 lm	4000K	○	IMS-GL0221-20W-840-S-15
▲ 24°	3478 lm			3000K	○	IMS-GL0221-20W-830-S-24		
	3695 lm			4000K	○	IMS-GL0221-20W-840-S-24		
▲ 40°	3547 lm			3000K	○	IMS-GL0221-20W-830-S-40		
	3680 lm			4000K	○	IMS-GL0221-20W-840-S-40		
>90	▲ 15°	3190 lm	3000K	○	IMS-GL0221-20W-930-S-15			
		3140 lm	3000K	○	IMS-GL0221-20W-930-S-24			
	▲ 24°	3165 lm	3000K	○	IMS-GL0221-20W-930-S-40			
	▲ 40°							




Technical Data test pattern


20W CRI80 15°

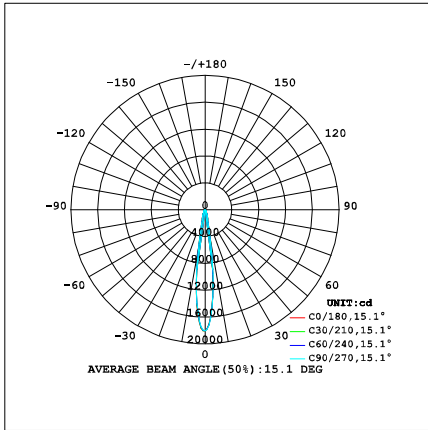


3000K

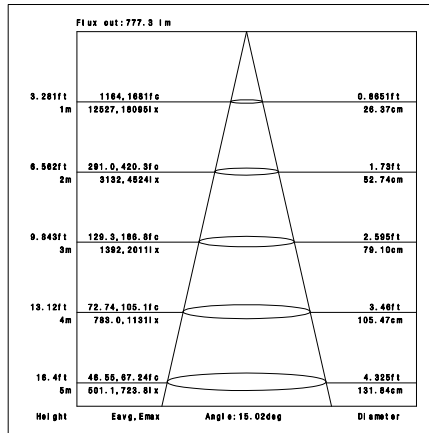


4000K

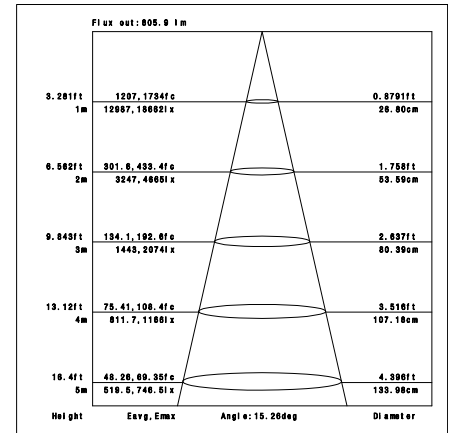


20W CRI80 24°

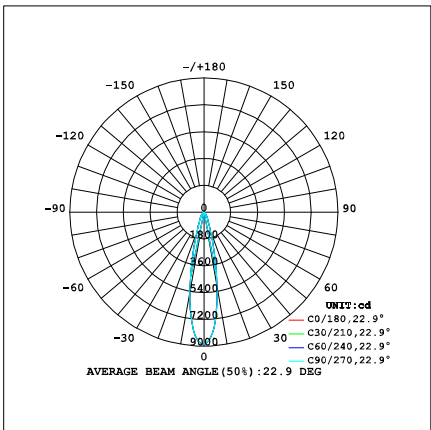


3000K

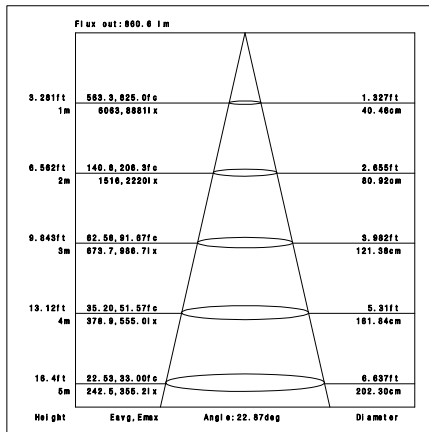


4000K

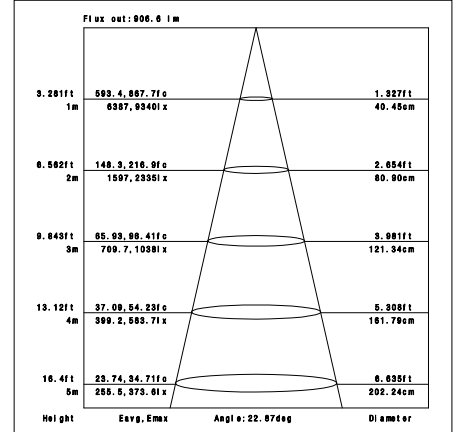


20W CRI80 40°

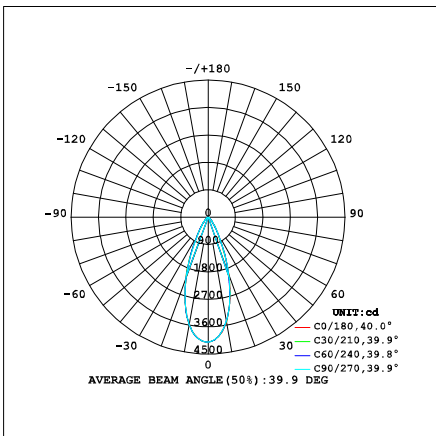





3000K

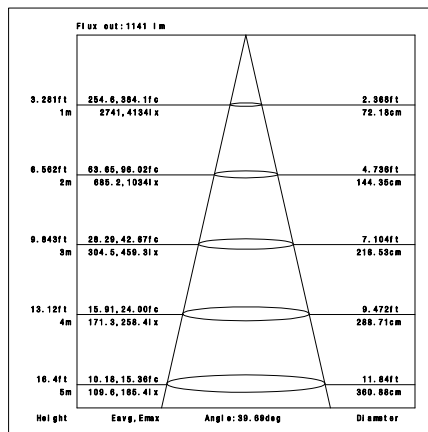

4000K

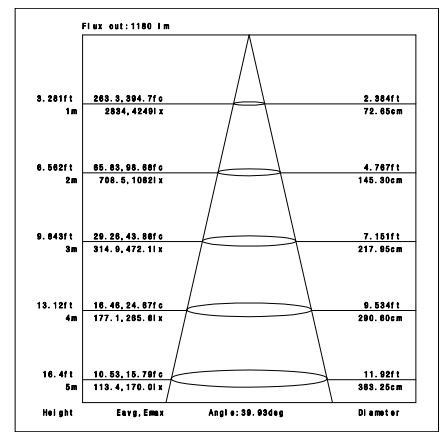


Installation instruction

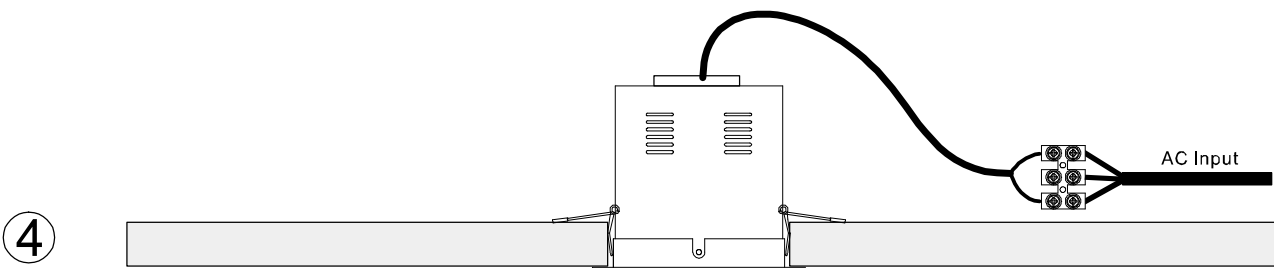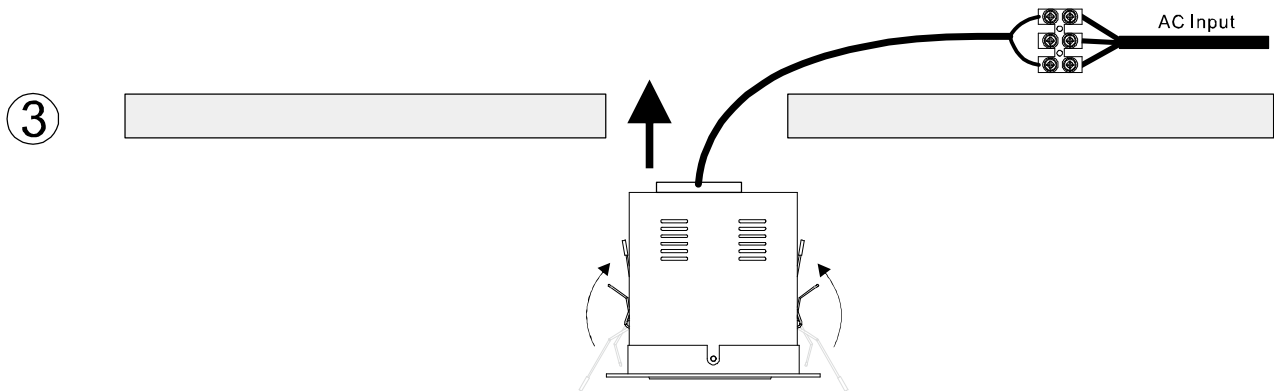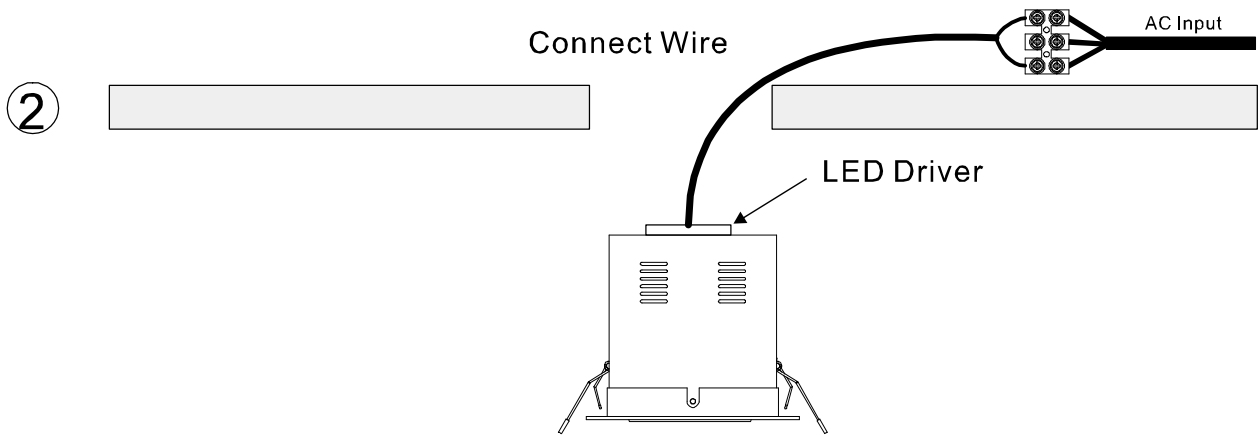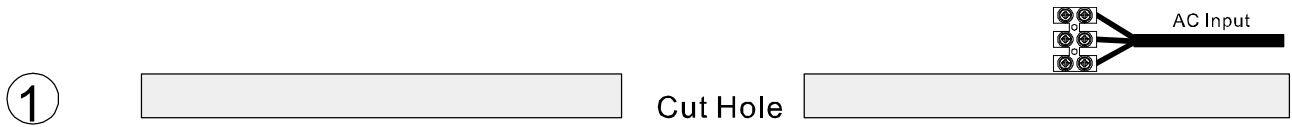


Packaging:

IMS-GL0211(Without driver)




Box
 L210*W210*H165mm
 1pc/box
 GW: 1.4kg/box




Outer carton
 L440*W440*H350mm
 8pcs/CTN
 GW: 12.2kg/carton

IMS-GL0221(Without driver)




Box
 L375*W210*H165mm
 1pc/box
 GW: 2.8kg/box




Outer carton
 L440*W390*H350mm
 4pcs/CTN
 GW: 12.2kg/carton

IMS-GL0231(Without driver)



Box
 L405*W170*H160mm
 1pc/box
 GW: 4.3kg/box



Outer carton
 L530*W415*H350mm
 6pcs/CTN
 GW: 26.8kg/carton

Product naming system

DL (X) XX X (H) – XW – X XX – X- XX

