


Cylinder series


TL51-3X12W

optical lens

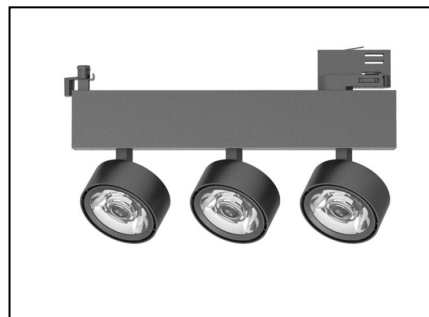

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	900mA, 35-37V
Beam Angle:	12°/24°/36°/60°
Life Time:	> 50,000h - L80 - B10 (Ta 25° C)
Operating temperature:	-20°C~40°C
Certificate:	CE/RoHS
Weight:	1.36kg

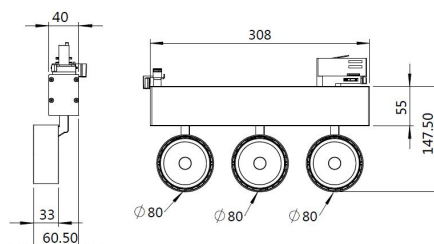


Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
3x12W	>80	▲ 12°	3X1200 lm	3000K	○	TL514-3X12W-830-W-12
					●	TL514-3X12W-830-B-12
		3X1300 lm	4000K	○	TL514-3X12W-840-W-12	
				●	TL514-3X12W-840-B-12	
		▲ 24°	3X1200 lm	3000K	○	TL514-3X12W-830-W-24
					●	TL514-3X12W-830-B-24
	3X1300 lm	4000K	○	TL514-3X12W-840-W-24		
			●	TL514-3X12W-840-B-24		
	▲ 36°	3X1200 lm	3000K	○	TL514-3X12W-830-W-36	
				●	TL514-3X12W-830-B-36	
	3X1300 lm	4000K	○	TL514-3X12W-840-W-36		
			●	TL514-3X12W-840-B-36		
>90	▲ 12°	3X1050 lm	3000K	○	TL514-3X12W-930-W-12	
				●	TL514-3X12W-930-B-12	
	▲ 24°	3X1080 lm	3000K	○	TL514-3X12W-930-W-24	
				●	TL514-3X12W-930-B-24	
	▲ 36°	3X1100 lm	3000K	○	TL514-3X12W-930-W-36	
				●	TL514-3X12W-930-B-36	

Technical Data test pattern


CRI80 12°

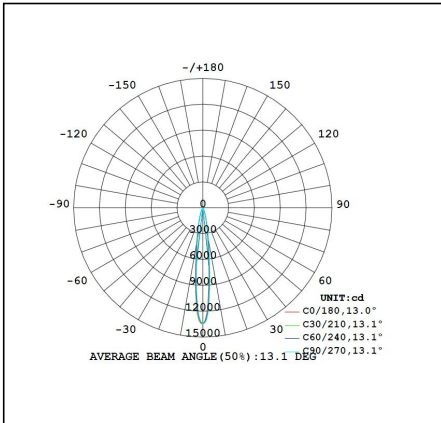


3000K

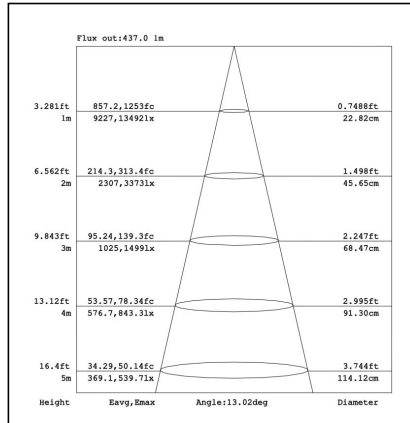


4000K

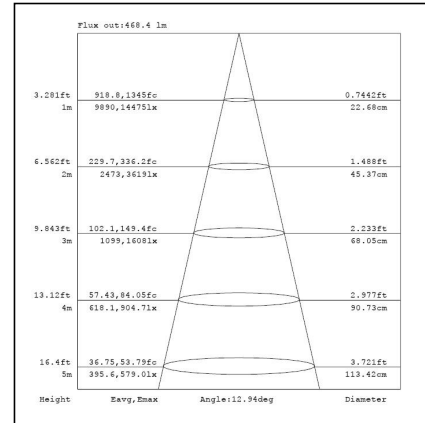


CRI80 24°

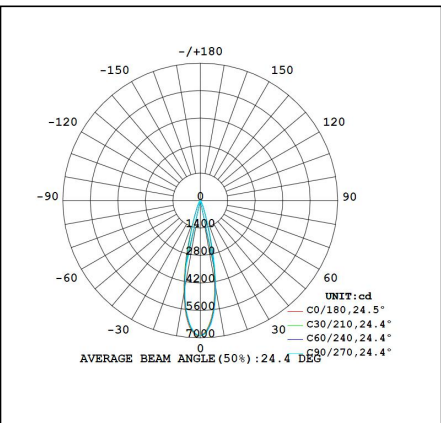


3000K

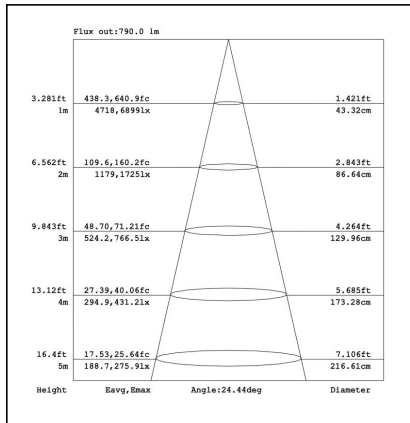


4000K

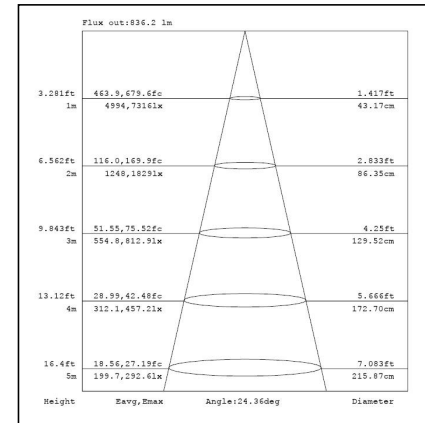


CRI80 36°

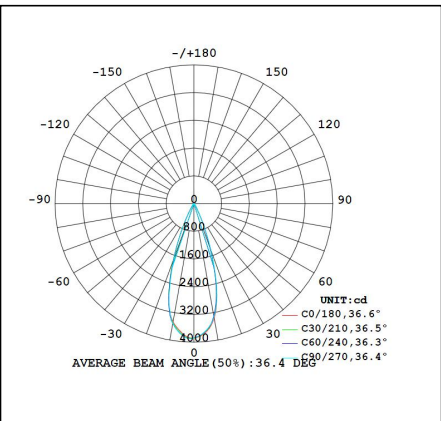

3000K


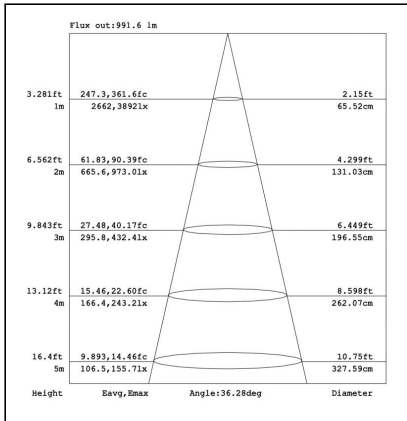


4000K

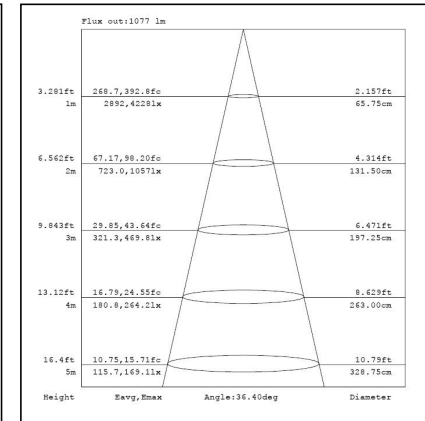



CRI90 12°

3000K

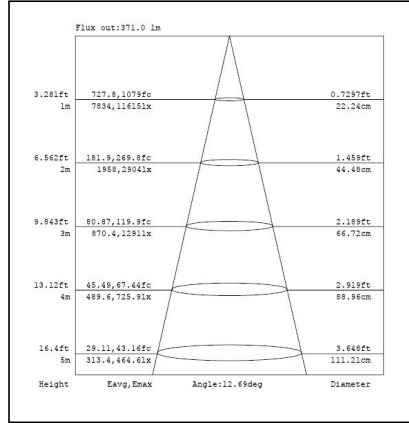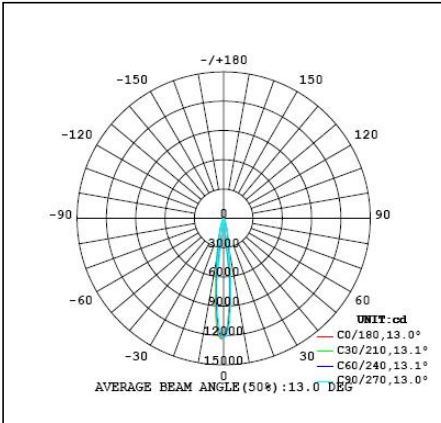



CRI90 24°

3000K

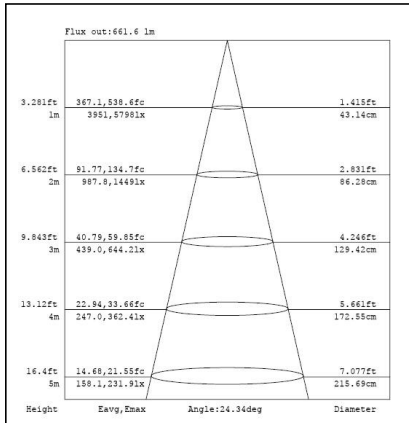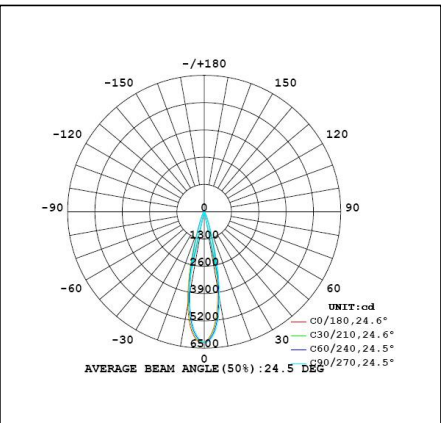





CRI90 36°

3000K

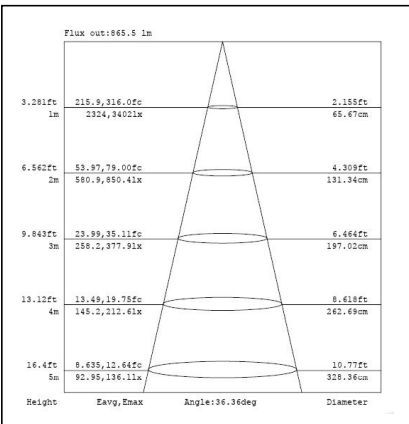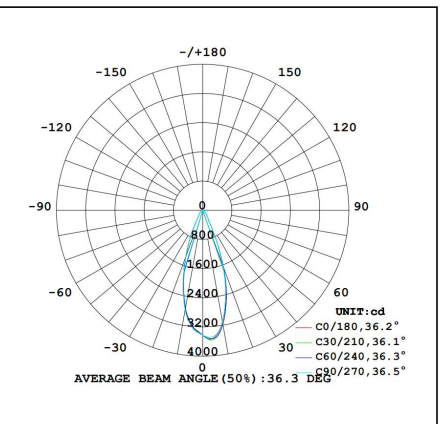


TL51 Tacklight Installation Instructions


Adaptor installation diagram

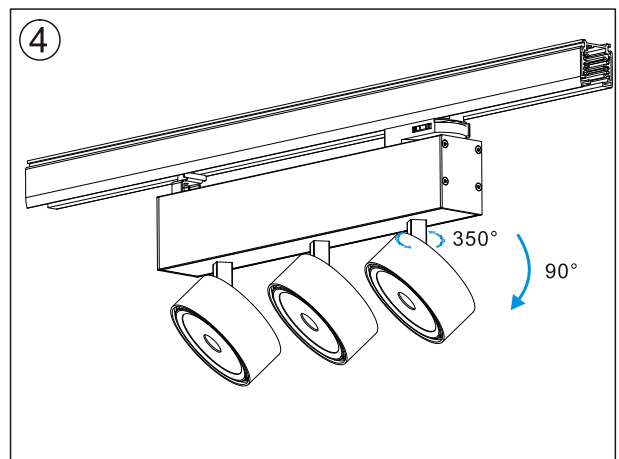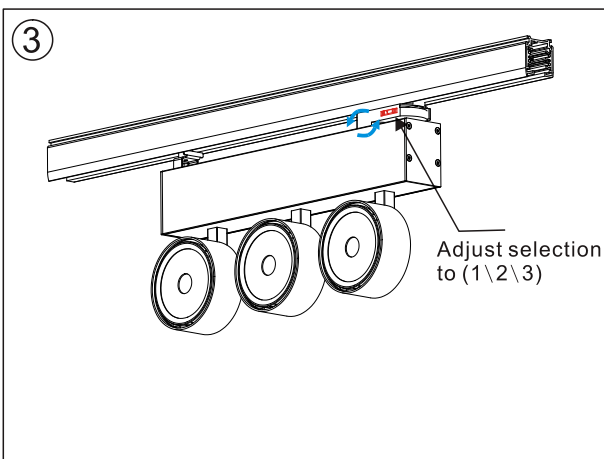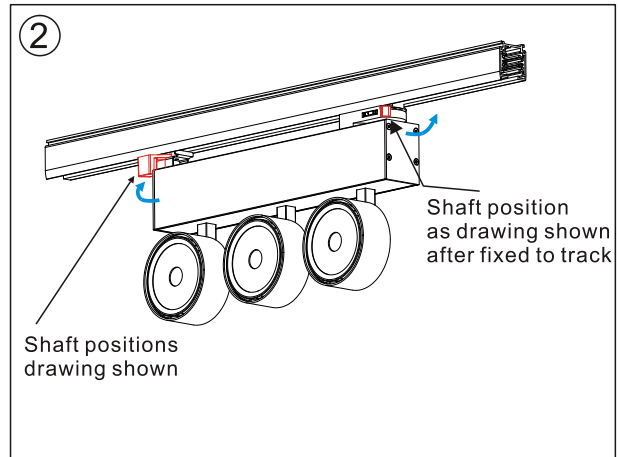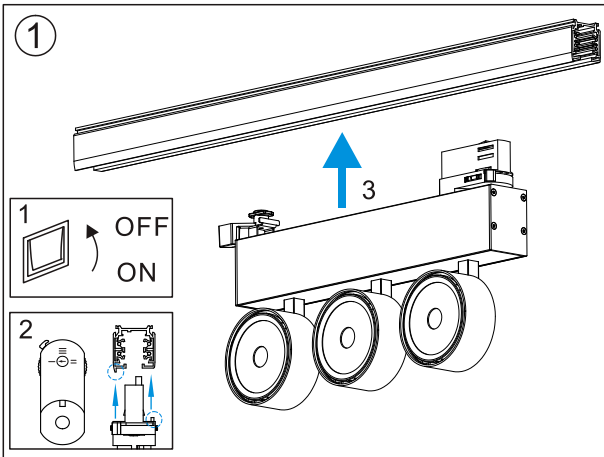

Packaging:



Box
 L350*W240*H80mm
 1pc/box
 GW: 1.4kg/box



Outer carton
 L500*W365*H340mm
 8pcs/CTN
 GW: 12.5kg/carton